



PROPRIETARY NOTE

THIS SPECIFICATION IS THE PROPERTY OF BOE CQ AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE CQ AND MUST BE RETURNED TO BOE CQ UPON ITS REQUEST

TITLE: NT116WHM-N21

Product Specification Rev. P0

Chongqing BOE Optoelectronics Technology Co., Ltd

SPEC. NUMBERPRODUCT GROUP
TFT-LCDRev.ISSUE DATE
2016.11.30PAGE

B2014-Q011-O (1/3) A4(210 X 297)





PRODUCT GROUP	REV	ISSUE DATE
Customer SPEC	Rev. O	2016.11.30

REVISION HISTORY

 $(\sqrt{\ })$ preliminary specification

()Final specification

Revision No.	Page	Description of changes	Date	Prepared
P0	33	Initial Release	2016.11.30	马童国/张加勤
)
			\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	
		0		

SPEC. NUMBER	SPEC. TITLE	PAGE
	NT116WHM-N21 Product Specification Rev. P0	2 OF 33

B2014-Q011-O (2/3)





PRODUCT GROUP	REV	ISSUE DATE
Customer SPEC	Rev. P0	2016.11.30

Contents

No.	Items	Page
	REVISION HISTORY	2
	CONTENTS	3
1.0	General Description	4
2.0	Absolute Maximum ratings	6
3.0	Electrical specifications.	7
4.0	Optical specifications.	10
5.0	Interface Connection	15
6.0	Signal Timing Specification	18
7.0	Input Signals, Display Colors & Gray Scale of Colors	20
8.0	Power Sequence	21
9.0	Connector description	22
10.0	Mechanical Characteristics	23
11.0	Reliability Test	24
12.0	Handling & Cautions.	24
13.0	Label	25
14.0	Packing information	27
15.0	Mechanical Outline Dimension	28
16.0	EDID Table	30

SPEC. NUMBER	SPEC. TITLE	PAGE
	NT116WHM-N21 Product Specification Rev. P0	3 OF 33

B2014-Q011-O (3/3)





PRODUCT GROUP	REV	ISSUE DATE
Customer SPEC	Rev. P0	2016.11.30

1.0 GENERAL DESCRIPTION

Global LCD Panel Exchange Center

1.1 Introduction

NT116WHM-N21 is a color active matrix TFT LCD module using amorphous silicon TFT's (Thin Film Transistors) as an active switching devices. This module has a 11.6 inch diagonally measured active area HD resolutions (1366 horizontal by 768 vertical pixel array). Each pixel is divided into RED, GREEN, BLUE dots which are arranged in vertical Stripe and this module can display 262,144 colors. The TFT-LCD panel used for this module is a low reflection and higher color type. Therefore, this module is suitable for Notebook PC. The LED Driver for back-light driving is built in this model. All input signals are eDP1.2 interface compatible.

LED Driver eDP Rx eDP Input Connector T/CON Signal TFT LCD Panel GOA GOA Mini-LVDS Tx 1366×768 **VDD** DC/DC LED Lighting Bar Gamma Vcom Source Driver

1.2 Features

- 1 lane eDP1.2 Interface with 1.62Gbps Link Rates
- Thin and light weight
- 6-bit color depth, display 262K colors
- Single LED Lighting Bar. (Down side/Horizontal Direction)
- Green Product (RoHS & Halogen free product)
- On board LED Driving circuit
- Low driving voltage and low power consumption
- On board EDID chip

	·	
SPEC. NUMBER	SPEC. TITLE	PAGE
	NT116WHM-N21 Product Specification Rev. P0	4 OF 33
B201/L-0011_0 (3/3)	•	Δ4(210 X 207)





PRODUCT GROUP	REV	ISSUE DATE
Customer SPEC	Rev. P0	2016.11.30

1.3 Application

Notebook PC

1.4 General Specification

The followings are general specifications at the model NT116WHM-N21. (listed in Table 1.)

<Table 1. General Specifications>

Parameter	Specification	Unit	Remarks
Active area	256.125(H) ×144.00(V)	mm	
Number of pixels	1366 (H) ×768 (V)	pixels	
Pixel pitch	0.1875 (H) X 0.1875 (V)	mm	
Pixel arrangement	RGB Vertical stripe		
Display colors	262K	colors	
Display mode	Normally White		
Dimensional outline	268(H)*168 (V) (W/PCB)*3.0(Max) 278(H) (W/BRACKET)*168 (V)*3.0(Max)	mm	
Weight	210(Max)	g	
Surface treatment	AG		
Back-light	Lower Down side, 1-LED Lighting Bar type		Note 1
Power consumption	Pp : 0.7(typ.)	W	@mosaic
	Рв∟ :1.65	W	
,	Ptotal :2.35(typ.)	W	

Notes: 1. LED Lighting Bar (21*LED Array)

SPEC. NUMBER	SPEC. TITLE	PAGE
	NT116WHM-N21 Product Specification Rev. P0	5 OF 33





PRODUCT GROUP	REV	ISSUE DATE
Customer SPEC	Rev. P0	2016.11.30

2.0 ABSOLUTE MAXIMUM RATINGS


The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Absolute Maximum Ratings>

Ta=25+/-2°C

Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	-0.3	4.0	V	Note 1
Logic Supply Voltage	V _{IN}	V _{ss} -0.3	V _{DD} +0.3	V	Note 1
Operating Temperature	T _{OP}	0	+50	$^{\circ}$	Note 2
Storage Temperature	T _{ST}	-20	+60	$^{\circ}$ C	Note 2

- Notes: 1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.
 - 2. Temperature and relative humidity range are shown in the figure below. 95 % RH Max. ($40~^{\circ}C \geq Ta$) Maximum wet bulb temperature at 39 $^{\circ}C$ or less. (Ta > $40~^{\circ}C$) No condensation.

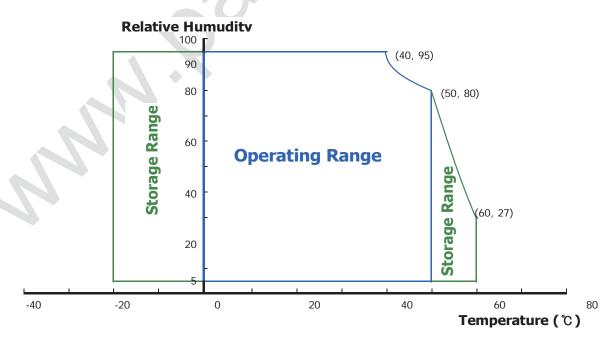

SPEC. NUMBER	SPEC. TITLE	PAGE
	NT116WHM-N21 Product Specification Rev. P0	6 OF 33

B2014-Q011-O (3/3)





PRODUCT GROUP	REV	ISSUE DATE
Customer SPEC	Rev. P0	2016.11.30

3.0 ELECTRICAL SPECIFICATIONS

3.1 Electrical Specifications

< Table 3. Electrical specifications >

Ta=25+/-2°C

Parameter		Min.	Тур.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	3.0	3.3	3.6	V	Note 1
Permissible Input Ripple Voltage	V _{RF}	-	-	200	mV	At V _{DD} = 3.3V
Power Supply Current	I _{DD}	-	TBD	TBD	mA	Note 1
Differential Input Voltage	V _{ID}	100	-	600	mV	
	P _D		0.7	TBD	W	Note 1
Power Consumption	P _{BL}	-	-	1.65	W	Note 2
	P _{total}	-	-	TBD	W	

Notes : 1. The supply voltage is measured and specified at the interface connector of LCM. The current draw and power consumption specified is for 3.3V at 25 $^{\circ}$ C.

2. Calculated value for reference (VLED \times ILED)

SPEC. NUMBER	SPEC. TITLE	PAGE
	NT116WHM-N21 Product Specification Rev. P0	7 OF 33

B2014-Q011-O (3/3)



PRODUCT GROUP	REV	ISSUE DATE
Customer SPEC	Rev. P0	2016.11.30

3.2 Backlight Unit

< Table 4. LED Driving guideline specifications >

Ta=25+/-2°C

	Parameter		Min.	Тур.	Max.	Unit	Remarks
LED Forward	l Voltage	V _F	-	2.9	-	V	-
LED Forward	l Current	I _F	-	21.5	-	mA	-
LED Power C	Consumption	P _{LED}		1.56	-	W	Note 1
LED Life-Tim	е	N/A	15,000	- 4	1-	Hour	I _F = 21.5mA
Power supply LED Driver	voltage for	V _{LED}	5	12	21	V	
EN Control	Backlight on		2.5		5.0	V	
Level	Backlight off		0		0.6	V	
PWM	PWM High Level		2.5		5.0	V	
Control Level	PWM Low Level		0		0.6	V	
PWM Contro	I Frequency	F _{PWM}	100	-	10,000	Hz	
Duty Ratio	100	-	1	-	100	%	Note3

Notes : 1. Power supply voltage12V for LED Driver Calculator Value for reference IF \times VF \times 36 / efficiency = PLED

- 2. The LED Life-time define as the estimated time to 50% degradation of initial luminous.
- 3. 1% duty cycle is achievable with a dimming frequency less than 1KHz.

	141110441111111421110440100000000000000	
	NT116WHM-N21 Product Specification Rev. P0	8 OF 33
SPEC. NUMBER	SPEC. TITLE	PAGE


B2014-Q011-O (3/3)





PRODUCT GROUP	REV	ISSUE DATE
Customer SPEC	Rev. P0	2016.11.30

3.3 LED structure

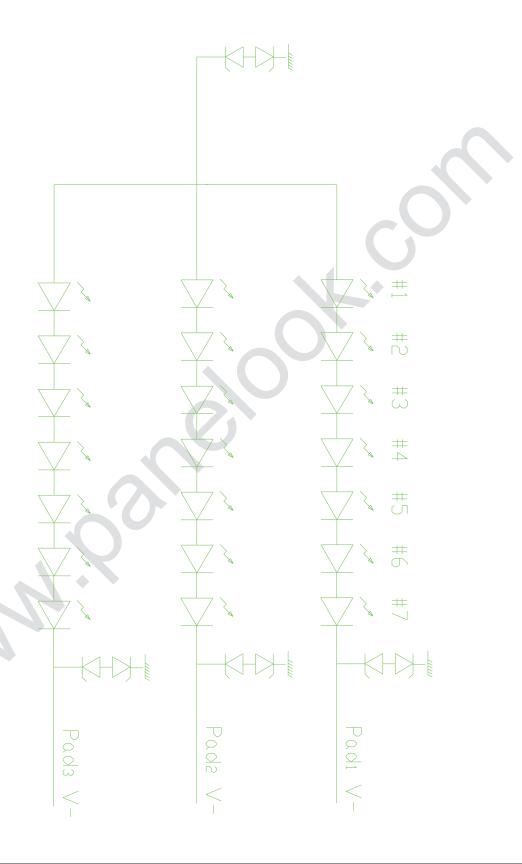

SPEC. NUMBER

SPEC. TITLE

NT116WHM-N21 Product Specification Rev. P0

PAGE 9 **OF 33**





PRODUCT GROUP	REV	ISSUE DATE
Customer SPEC	Rev. P0	2016.11.30

4.0 OPTICAL SPECIFICATION

4.1 Overview

The test of Optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25\pm2^{\circ}$ C) with the equipment of Luminance meter system (Goniometer system and TOPCON BM-5) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and Φ equal to θ 0°. We refer to θ 0=0 (= θ 3) as the 3 o'clock direction (the "right"), θ 0=90 (= θ 12) as the 12 o'clock direction ("upward"), θ 0=180 (= θ 9) as the 9 o'clock direction ("left") and θ 0=270(= θ 6) as the 6 o'clock direction ("bottom"). While scanning θ and/or θ 0, the center of the measuring spot on the Display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement. VDD shall be 3.3+/- 0.3V at 25°C. Optimum viewing angle direction is 6 'clock.

4.2 Optical Specifications

<Table 5. Optical Specifications>

Paramo	eter	Symbol	Condition	Min.	Тур.	Max.	Unit	Remark		
raram			Jonation	_	45	IVIGA		Remark		
\	Horizontal	Θ_3		-			Deg.			
Viewing Angle		Θ_9	CR > 10	-	45	-	Deg.	Note 1		
range	Vertical	Θ_{12}		<u> </u>	20	-	Deg.			
	Voltioai	Θ_6		-	40	-	Deg.			
Luminance Co	ntrast ratio	CR	Θ = 0°	400	500			Note 2		
Luminance of White	5 Points	Y _w	Θ = 0°	187	220	-	cd/m ²	Note 3		
White	5 Points	ΔΥ5	$ \mathbf{LED} = \mathbf{21.5mA} $	80%	-	-		Note 4		
Luminance uniformity 13 P	13 Points	ΔΥ13		65%	-	-		Note 4		
White Chro	oo oti oitu	X _w	⊙ = 0°	0.283	0.313	0.343		Note F		
White Chro	maticity	y_w		0.299	0.329	0.359		Note 5		
		X _R				0.582				
	Red	y _R	1		0.362			1		
Reproduction		X _G			0.346]		
of color	Green	y _G	○ = 0°-0	Θ = 0°	\Box $\Theta = 0^{\circ}$	-0.03	0.580	+0.03		1
		X _B	1	0	0.163	1		1		
	Blue	y _B			0.142]		
Gamı	ut				45		%			
Response (Rising + F		T _{RT}	Ta= 25° C Θ = 0°	-	12	-	ms	Note 6		
Cross T	alk	CT	Θ = 0°	-	-	2.0	%	Note 7		

SPEC. NUMBER	SPEC. TITLE	PAGE
	NT116WHM-N21 Product Specification Rev. P0	10 OF 33

B2014-Q011-O (3/3)





PRODUCT GROUP	REV	ISSUE DATE	
Customer SPEC	Rev. P0	2016.11.30	

Notes:

- 1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE 1).
- 2. Contrast measurements shall be made at viewing angle of Θ = 0 and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state.

(see FIGURE 1) Luminance Contrast Ratio (CR) is defined mathematically.

- 3. Center Luminance of white is defined as luminance values of 5 point average across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.
- 4. The White luminance uniformity on LCD surface is then expressed as : ΔY =Minimum Luminance of 5(or 13) points / Maximum Luminance of 5(or 13) points. (see FIGURE 2 and FIGURE 3).
- 5. The color chromaticity coordinates specified in Table 5 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.
- 6. The electro-optical response time measurements shall be made as FIGURE 4 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is Tr, and 90% to 10% is Td.
- 7. Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (YA) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (YB) of that same area when any adjacent area is driven dark. (See FIGURE 5).

SPEC. NUMBER	SPEC. TITLE	PAGE
	NT116WHM-N21 Product Specification Rev. P0	11 OF 33

B2014-Q011-O (3/3)






4.3 Optical measurements


Global LCD Panel Exchange Center

Figure 1. Measurement Set Up

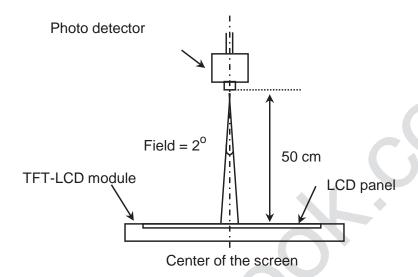

Optical characteristics measurement setup

Figure 2. White Luminance and Uniformity Measurement Locations (5 points)

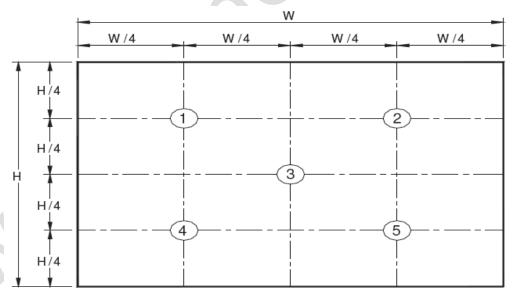


Center Luminance of white is defined as luminance values of center 5 points across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.

SPEC. NUMBER	SPEC. TITLE	PAGE
	NT116WHM-N21 Product Specification Rev. P0	12 OF 33
B2014-Q011-O (3/3)	•	A4(210 X 297)






Figure 3. Uniformity Measurement Locations (13 points)

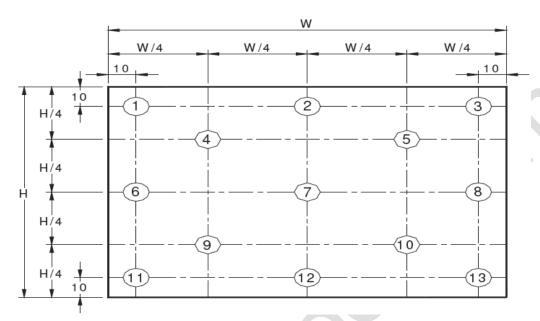

The White luminance uniformity on LCD surface is then expressed as : $\Delta Y5 = Minimum Luminance of five points / Maximum Luminance of five points (see FIGURE 2), <math>\Delta Y13 = Minimum Luminance of 13 points / Maximum Luminance of 13 points (see FIGURE 3).$

Figure 4. Response Time Testing

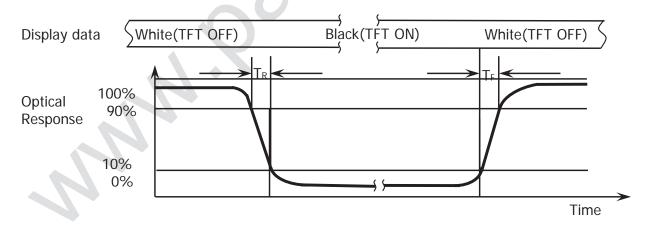

The electro-optical response time measurements shall be made as shown in FIGURE 4 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is Td and 90% to 10% is Tr.

SPEC. NUMBER	SPEC. TITLE	PAGE
	NT116WHM-N21 Product Specification Rev. P0	13 OF 33
B2014-Q011-O (3/3)	•	A4(210 X 297)






Global LCD Panel Exchange Center

E	PRODUCT GROUP		ISSUE DATE
	Customer SPEC	Rev. P0	2016.11.30

Figure 5. Cross Modulation Test Description

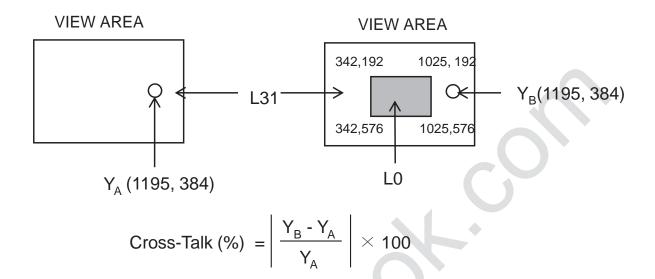

Where:

 $Y_A = Initial luminance of measured area (cd/m²)$

 Y_B = Subsequent luminance of measured area (cd/m²)

The location measured will be exactly the same in both patterns

Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (YA) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (YB) of that same area when any adjacent area is driven dark (Refer to FIGURE 5).

SPEC. NUMBER	SPEC. TITLE	PAGE
	NT116WHM-N21 Product Specification Rev. P0	14 OF 33





PRODUCT GROUP	REV	ISSUE DATE
Customer SPEC	Rev. P0	2016.11.30

5.0 INTERFACE CONNECTION.

5.1 Electrical Interface Connection

The electronics interface connector is UJU $\rm IS050\text{-}L30B\text{-}C10$ or Compatible.

The connector interface pin assignments are listed in Table 6.

<Table 6. Pin Assignments for the Interface Connector>

Terminal	Symbol	Functions
Pin No.	Symbol	Description
1	CABC_ENABLE	DCR Function, Reserved
2	H_GND	Ground
3	NC	No Connection
4	NC	No Connection
5	H_GND	Ground
6	LANE0_N	eDP RX channel 0 negative
7	LANE0_P	eDP RX channel 0 positive
8	H_GND	Ground
9	AUX_CH_P	eDP AUX CH positive
10	AUX_CH_N	eDP AUX CH negative
11	H_GND	Ground
12	LCD_VCC	Power Supply, 3.3V (typ.)
13	LCD_VCC	Power Supply, 3.3V (typ.)
14	LCD_Self_Test	Panel self test
15	H_GND	Ground
16	H_GND	Ground
17	HPD	Hot plug detect output
18	BL_GND	LED Ground
19	BL_GND	LED Ground
20	BL_GND	LED Ground
21	BL_GND	LED Ground
22	BL_ENABLE	LED enable pin(+3.3V Input)
23	BL_PWM	System PWM Signal Input
24	Hsnyc	Line synchronization, Reserved
25	COLOR_ENABLE	test enable
26	BL_POWER	LED Power Supply 5V-21V
27	BL_POWER	LED Power Supply 5V-21V
28	BL_POWER	LED Power Supply 5V-21V
29	BL_POWER	LED Power Supply 5V-21V
30	NC	No Connection

SPEC. NUMBER	SPEC. TITLE	PAGE
	NT116WHM-N21 Product Specification Rev. P0	15 OF 33


B2014-Q011-O (3/3)



Global LCD Panel Exchange Center



5-2. eDP Interface

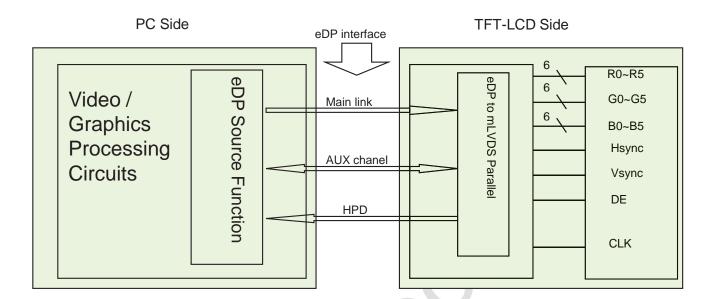

Note. Transmitter: Parade DP501 or equivalent
Transmitter is not contained in Module.

5.3.eDP Input signal

Lane 0				
R0-5:0	G0-5:4			
G0-3.0	B0-5:2			
B0-1:0	R1-5:0			
G1-5:0	B1-5:4			
B1-3:0	R2-5:2			
R2-1:0	G2-5:0			
B2-5:0	R3-5:4			
R3-3:0	G3-5:2			
G3-1:0	B3-5:0			

SPEC. NUMBER	SPEC. TITLE	PAGE
	NT116WHM-N21 Product Specification Rev. P0	16 OF 33

B2014-Q011-O (3/3)





5.4 Back-light & LCM Interface Connection

Interface Connector: UJU IS050-L30B-C10

<Table 7. Pin Assignments for the BLU & LCM Connector>

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	LED1	LED cathode connection	6	GND	Ground
2	LED2	LED cathode connection	7	NC	No Connection
3	LED3	LED cathode connection	8	Vout	LED anode connection
4	NC	No Connection	9	Vout	LED anode connection
5	NC	No Connection	10	Vout	LED anode connection

SPEC. NUMBER SPEC. TITLE PAGE
NT116WHM-N21 Product Specification Rev. P0

PAGE
17 OF 33

B2014-Q011-O (3/3) A4(210 X 297)





PRODUCT GROUP	REV	ISSUE DATE
Customer SPEC	Rev. P0	2016.11.30

6.0 SIGNAL TIMING SPECIFICATION

6.1 The NT116WHM-N21 is operated by the DE only.

	Item	Symbols	Min	Тур	Max	Unit
	Frequency	1/Tc	61	76.3	80.04	MHz
Clock	High Time	Tch	-	4/7	- (Tc
	Low Time	Tcl	-	3/7		Tc
			780	808	840	lines
Fra	ame Period	Tv	-	60	_	Hz
			-	16.7	_	ms
Vertical	Display Period	Tvd	768	768	768	lines
One I	ine Scanning Period	Th	1590	1592	1692	clocks
Horiz	ontal Display Period	Thd	1366	1366	1366	clocks

Note $^{\times}$: This Module can support low frame refresh rate 60Hz & 48Hz.

SPEC. NUMBER	SPEC. TITLE	PAGE
	NT116WHM-N21 Product Specification Rev. P0	18 OF 33

B2014-Q011-O (3/3)





PRODUCT GROUP	REV	ISSUE DATE
Customer SPEC	Rev. P0	2016.11.30

6.2 eDP Rx Interface Timing Parameter

The specification of the eDP Rx interface timing parameter is shown in Table 8.

<Table 8. eDP Rx Interface Timing Specification>

Item	Symbol	Min	Тур	Max	Unit	Remark
Spread spectrum clock	SSC		0.5		%	
Differential peak-to-peak input volt age at package pins	VRX-DIFFp-p	120	-	1200	mV	
Rx input DC common mode voltage	VRX_DC_CM	ı	GND	-	V	
Differential termination resistance	RRX-DIFF	80	-	100	Ω	
Single-ended termination resistance	RRX-SE	40	-	60	Ω	
Rx short circuit current limit	IRX_SHORT	-		20	mA	
Intra-pair skew at Rx package pins (HBR) RX intra-pair skew tolerance at HBR	LRX_SKEW_ INTRA_PAIR	0		150	ps	

SPEC. NUMBER SPEC. TITLE PAGE
NT116WHM-N21 Product Specification Rev. P0

PAGE
19 OF 33

B2014-Q011-O (3/3)





PRODUCT GROUP REV ISSUE DATE

Customer SPEC Rev. P0 2016.11.30

7.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

	Colors &		Data signal	
	Gray scale	R0 R1 R2 R3 R4 R5	G0 G1 G2 G3 G4 G5	B0 B1 B2 B3 B4 B5
	Black	0 0 0 0 0 0	0 0 0 0 0 0	0 0 0 0 0 0
	Blue	0 0 0 0 0 0	0 0 0 0 0 0	1 1 1 1 1 1
Basic	Green	0 0 0 0 0 0	1 1 1 1 1 1	0 0 0 0 0
colors	Light Blue	0 0 0 0 0 0	1 1 1 1 1 1	1 1 1 1 1
	Red	1 1 1 1 1 1	0 0 0 0 0 0	0 0 0 0 0 0
	Purple	1 1 1 1 1 1	0 0 0 0 0 0	1 1 1 1 1 1
	Yellow	1 1 1 1 1 1	1 1 1 1 1 1	0 0 0 0 0 0
	White	1 1 1 1 1 1	1 1 1 1 1 1	1 1 1 1 1 1
	Black	0 0 0 0 0 0	0 0 0 0 0 0	0 0 0 0 0 0
	Δ	1 0 0 0 0 0	0 0 0 0 0 0	0 0 0 0 0 0
	Darker	0 1 0 0 0 0	0 0 0 0 0 0	0 0 0 0 0 0
Gray scale	Δ	1	1	1
of Red	∇	\downarrow	↓	\downarrow
	Brighter	1 0 1 1 1 1	0 0 0 0 0 0	0 0 0 0 0 0
	∇	0 1 1 1 1 1	0 0 0 0 0 0	0 0 0 0 0 0
	Red	1 1 1 1 1 1	0 0 0 0 0 0	0 0 0 0 0 0
	Black	0 0 0 0 0 0	0 0 0 0 0 0	0 0 0 0 0 0
	Δ	0 0 0 0 0 0	1 0 0 0 0 0	0 0 0 0 0 0
	Darker	0 0 0 0 0 0	0 1 0 0 0 0	0 0 0 0 0 0
Gray scale		1	1	↑
of Green	∇	\downarrow	↓	↓
	Brighter	0 0 0 0 0	1 0 1 1 1 1	0 0 0 0 0 0
	∇	0 0 0 0 0 0	0 1 1 1 1 1	0 0 0 0 0 0
	Green	0 0 0 0 0 0	1 1 1 1 1 1	0 0 0 0 0 0
	Black	0 0 0 0 0	0 0 0 0 0 0	0 0 0 0 0 0
		0 0 0 0 0 0	0 0 0 0 0 0	1 0 0 0 0 0
_	Darker	0 0 0 0 0 0	0 0 0 0 0 0	0 1 0 0 0 0
Gray scale		1	\downarrow	<u>↑</u>
of Blue	∇	\	↓	↓
	Brighter	0 0 0 0 0 0	0 0 0 0 0 0	1 0 1 1 1 1
	∇	0 0 0 0 0 0	0 0 0 0 0 0	0 1 1 1 1 1
	Blue	0 0 0 0 0 0	0 0 0 0 0 0	1 1 1 1 1 1
	Black	0 0 0 0 0 0	0 0 0 0 0 0	0 0 0 0 0 0
Gray	Δ	1 0 0 0 0 0	1 0 0 0 0 0	1 0 0 0 0 0
scale	Darker	0 1 0 0 0 0	0 1 0 0 0 0	0 1 0 0 0 0
of		1	1	<u> </u>
White	∇	<u> </u>	\	1
&	Brighter	1 0 1 1 1 1	1 0 1 1 1 1	1 0 1 1 1 1
Black	\\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\	0 1 1 1 1 1	0 1 1 1 1 1	0 1 1 1 1 1
	White	1 1 1 1 1 1	1 1 1 1 1 1	1 1 1 1 1 1

SPEC. NUMBER	SPEC. TITLE	PAGE
	NT116WHM-N21 Product Specification Rev. P0	20 OF 33

B2014-Q011-O (3/3)






PRODUCT GROUP	REV	ISSUE DATE
Customer SPEC	Rev. P0	2016.11.30

8.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off seq uence shall be as shown in below

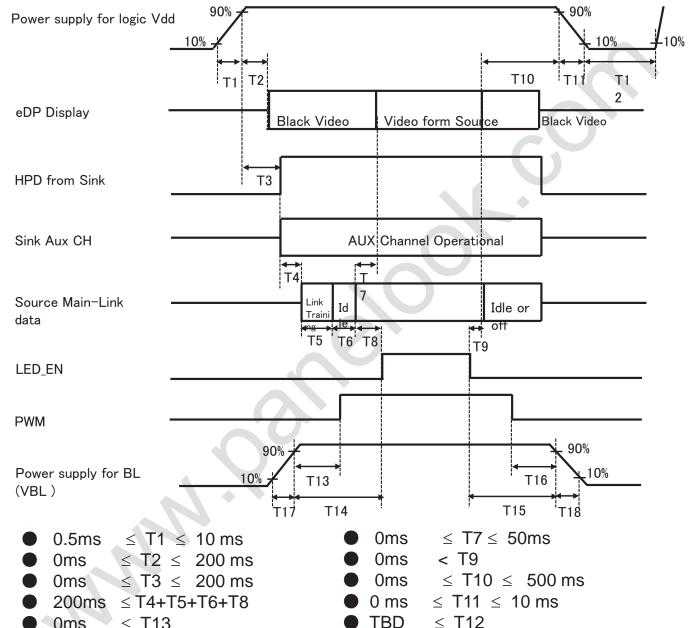

- 0ms < T13
- ≤ T14 0ms
- ≤ T17 0ms

Notes:

- TBD
- 0ms ≤ T15
- 0ms ≤ T16
- ≤ T18 0ms
- 1. When the power supply VDD is 0V, keep the level of input signals on the low or k eep high impedance.
- 2. Do not keep the interface signal high impedance when power is on. Back Light must be turn on after power for logic and interface signal are valid.

SPEC. NUMBER	SPEC. TITLE	PAGE
	NT116WHM-N21 Product Specification Rev. P0	21 OF 33
	·	





PRODUCT GROUP	REV	ISSUE DATE
Customer SPEC	Rev. P0	2016.11.30

9.0 Connector Description

Physical interface is described as for the connector on LCM.

These connectors are capable of accommodating the following signals and will be following components.

9.1 TFT LCD Module

Connector Name /Description	For Signal Connector
Manufacturer	UJU or Compatible
Type/ Part Number	IS050-L30B-C10 or Compatible
Mating housing/ Part Number	I-PEX 20454-030T or Compatible

SPEC. NUMBER SPEC. TITLE PAGE 22 **OF 33** NT116WHM-N21 Product Specification Rev. P0

B2014-Q011-O (3/3)



PRODUCT GROUP	REV	ISSUE DATE
Customer SPEC	Rev. P0	2016.11.30

10.0 MECHANICAL CHARACTERISTICS

10.1 Dimensional Requirements

FIGURE 6 shows mechanical outlines for the model NT116WHM-N21. Other parameters are shown in Table 9.

<Table 9. Dimensional Parameters>

Parameter	Specification	Unit
Active Area	256.125(H) ×144(V)	
Number of pixels	1366 (H) X 768 (V) (1 pixel = R + G + B dots)	
Pixel pitch	0.1875 (H) X 0.1875 (V)	
Pixel arrangement	RGB Vertical stripe	
Display colors	262K	
Display mode	Normally white	
Dimensional outline	268(H)*168 (V) (W/PCB)*3.0(Max) 278(H) (W/BRACKET)*168 (V)*3.0(Max)	mm
Weight	210(Max)	gram
Dook Light	IS050-L30B-C10	
Back Light —	LED, Horizontal-LED Array type	

10.2 Mounting

See FIGURE 6.

10.3 Glare and Polarizer Hardness.

The surface of the LCD has an glare coating to maximize readability and hard coating to reduce scratching.

10.4 Light Leakage

There shall not be visible light from the back-lighting system around the edges of the screen as seen from a distance 50cm from the screen with an overhead light level of 350lux.

SPEC. NUMBER	SPEC. TITLE	PAGE
	NT116WHM-N21 Product Specification Rev. P0	23 OF 33





PRODUCT GROUP	REV	ISSUE DATE
Customer SPEC	Rev. P0	2016.11.30

11.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.

<Table 10. Reliability test>

No	Test Items	Conditions		
1	High temperature storage test	Ta = 60 °C, 240 hrs		
2	Low temperature storage test	Ta = -20 °C, 240 hrs		
3	High temperature & high humidity operation test	Ta = 50 °C, 80%RH, 240 hrs		
4	High temperature operation test	Ta = 50 ℃, 240 hrs		
5	Low temperature operation test	Ta = 0 °C, 240 hrs		
6	Thermal shock	Ta = -20 °C \leftrightarrow 60 °C (0.5 hr), 100 cycle		
7	Vibration test (non-operating)	1.5G, 10~500Hz,Half Sine X,Y,Z / Sweep rate : 1 hour		
8	Shock test (non-operating)	220G, Half Sine Wave 2msec \pm X, \pm Y, \pm Z Once for each direction		
9	Electro-static discharge test	Air : 150 pF, 330Ω, 15 KV		

12.0 HANDLING & CAUTIONS

- (1) Cautions when taking out the module
 - Pick the pouch only, when taking out module from a shipping package.
- (2) Cautions for handling the module
 - As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
 - As the LCD panel and back light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
 - As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
 - Do not pull the interface connector in or out while the LCD module is operating.
 - Put the module display side down on a flat horizontal plane.
 - Handle connectors and cables with care.
- (3) Cautions for the operation
 - When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
 - Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.

SPEC. NUMBER	SPEC. TITLE	PAGE
	NT116WHM-N21 Product Specification Rev. P0	24 OF 33





PRODUCT GROUP	REV	ISSUE DATE
Customer SPEC	Rev. P0	2016.11.30

- (4) Cautions for the atmosphere
 - Dew drop atmosphere should be avoided.
 - Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.
- (5) Cautions for the module characteristics
 - Do not apply fixed pattern data signal to the LCD module at product aging.
 - Applying fixed pattern for a long time may cause image sticking.
- (6) Other cautions
 - Do not disassemble and/or re-assemble LCD module.
 - Do not re-adjust variable resistor or switch etc.
 - When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.

13.0 LABEL

(1) MDL label



1 2 6 5 Χ X Χ Χ Χ Χ Χ Χ Χ X X Χ Χ

Type designation

No 1. Control Number

No 2. Rank / Grade

No 3. Line classification

No 4. Year (10: 2010, 11: 2011, ...)

No 5. Month (1, 2, 3, ..., 9, X, Y, Z)

No 6. Product Identification (FG)

No 7. Serial Number

SPEC. NUMBER SPEC. TITLE

NT116WHM-N21 Product Specification Rev. P0

B2014-Q011-O (3/3)

A4(210 X 297)

PAGE

25 OF 33





PRODUCT GROUP	REV	ISSUE DATE	
Customer SPEC	Rev. P0	2016.11.30	

(2) High voltage caution label




HIGH VOLTAGE CAUTION

RISK OF ELECTRIC SHOCK, DISCONNECT THE ELECTRIC POWER BEFORE SERVICING

COLD CATHODE FLUORESCENT LAMP IN LCD
PANEL CONTAINS A SMALL AMOUNT

OF MERCURY, PLEASE FOLLOW LOCAL ORDINANCES OR REGULATIONS FOR DISPOSAL.

(3) Box label

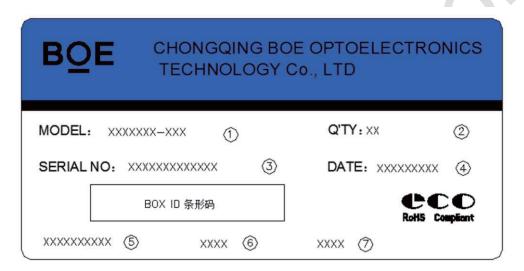

序列号标注部分需打印, Contents:

1. NT116WHM-N21

2. Q`ty: Module Q`ty in one box

3. Box ID

4. Packing Date

- 5. 客户端段物料号(客户端)---暂不打印
- 6. FG-Code后四位
- 7. 供应商代码---暂不打印

Total Size:100×50mm

Digit Code	1	2	3	4	5	6	7	8	9	10	11	12	13
Code	S	L	S	5	1	2	3	D	0	0	0	6	8
Description	Produc	ts GBN	Grade	Line		ar	Month	Revisio n Code			al No		•

SPEC. NUMBER	SPEC. TITLE	PAGE
	NT116WHM-N21 Product Specification Rev. P0	26 OF 33


B2014-Q011-O (3/3)





14.0 PACKING INFORMATION

15.1 Packing order

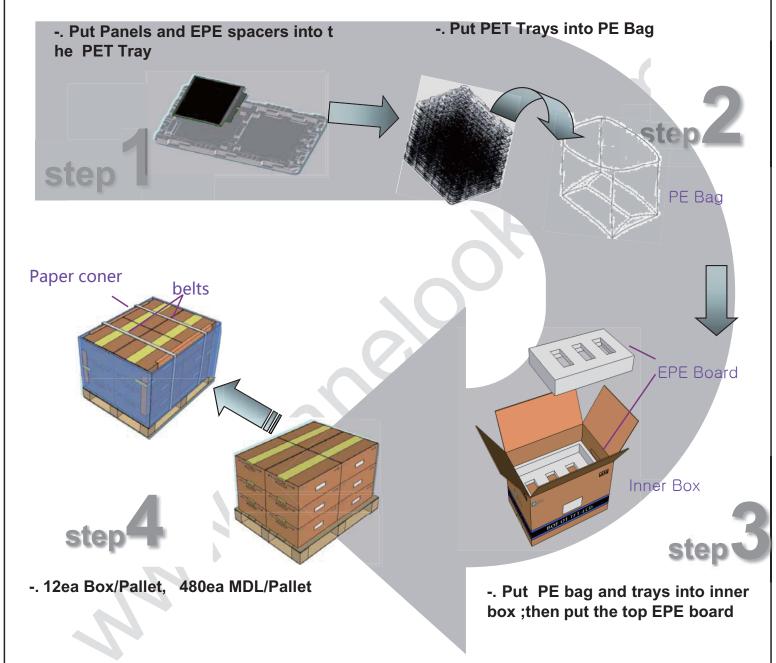

15.2 Notes

Box Dimension: 545mm×465mm×290mm

Package Quantity in one Box: 40pcs

● Total Weight: TBD

SPEC. NUMBER	SPEC. TITLE	PAGE
	NT116WHM-N21 Product Specification Rev. P0	27 OF 33
B2014-Q011-O (3/3)	•	A4(210 X 297)






PRODUCT GROUP	REV	ISSUE DATE
Customer SPEC	Rev. P0	2016.11.30

15.0 MECHANICAL OUTLINE DIMENSION

Figure 6. TFT-LCD Module Outline Dimension (Front View)

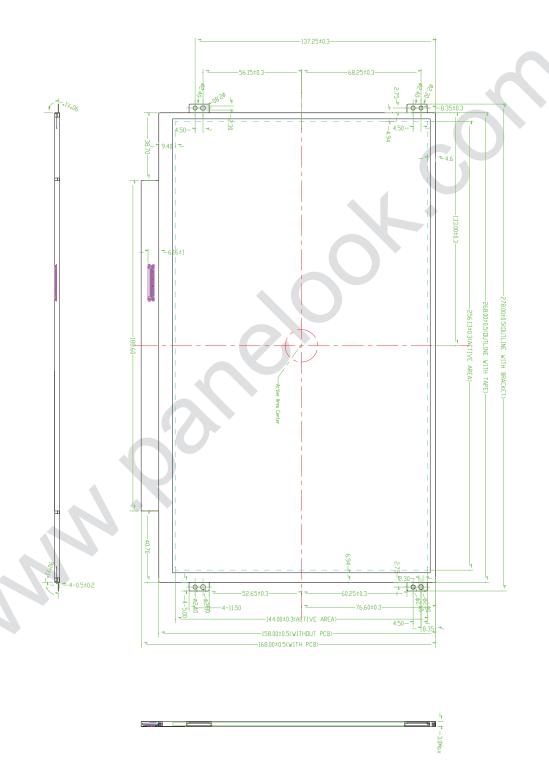


SPEC. NUMBER SPEC. TITLE PAGE
NT116WHM-N21 Product Specification Rev. P0


28 OF 33

B2014-Q011-O (3/3)







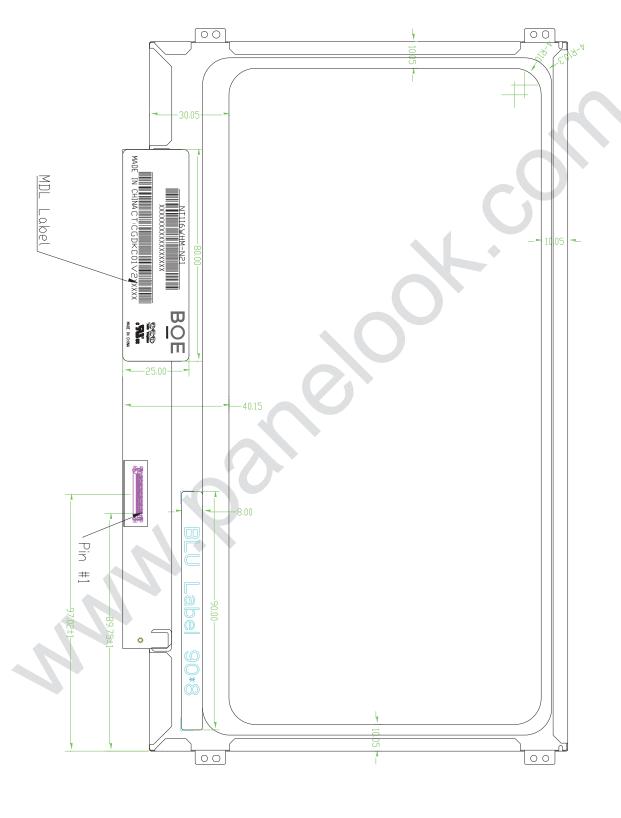


SPEC. NUMBER SPEC. TITLE PAGE
NT116WHM-N21 Product Specification Rev. P0

PAGE
29 OF 33

B2014-Q011-O (3/3)







16.0 EDID Table

Address (HEX)	Function	Hex	Dec	Input values.	Notes
00		00	0	0	
01		FF	255	255	
02		FF	255	255	
03	l loodor	FF	255	255	EDID II
04	Header	FF	255	255	EDID Header
05		FF	255	255	
06		FF	255	255	
07		00	0	0	
08	ID Manufacturer Name	09	9	DOE	ID DOE
09	ID Manufacturer Name	E5	229	BOE	ID = BOE
0A	ID Draduat Code	15	21	1012	ID 1012
0B	ID Product Code	07	7	1813	ID = 1813
0C		00	0		
0D	32-bit serial No.	00	0		
0E	32-bit Serial No.	00	0		
0F		00	0		
10	Week of manufacture	31	49	49	
11	Year of Manufacture	1A	26	2016	Manufactured in 2016
12	EDID Structure Ver.	01	1	1	EDID Ver 1.0
13	EDID revision #	04	4	4	EDID Rev. 0.4
14	Video input definition	95	149	-	
15	Max H image size	19	25	26	25.56 cm (Approx)
16	Max V image size	0E	14	14	14.4 cm (Approx)
17	Display Gamma	78	120	2.2	Gamma curve = 2.2
18	Feature support	02	2		RGB display, Preferred Timming mode
19	Red/Green low bits	E9	233	-	Red / Green Low Bits
1A	Blue/White low bits	9C	156	-	Blue / White Low Bits
1B	Red x high bits	95	149	0.582	Red $(x) = 10010101 (0.582)$
1C	Red y high bits	5C	92	0.362	Red $(y) = 01011100 (0.362)$
1D	Green x high bits	58	88	0.346	Green $(x) = 01011000 (0.346)$
1E	Green y high bits	94	148	0.580	Green (y) = 10010100 (0.58)
1F	Blue x high bits	29	41	0.163	Blue $(x) = 00101001 (0.163)$
20	BLue y high bits	24	36	0.142	Blue $(y) = 00100100 (0.142)$
21	White x high bits	4E	78	0.308	White $(x) = 01001110 (0.308)$
22	White y high bits	58	88	0.344	White $(y) = 01011000 (0.344)$
23	Established timing 1	00	0	-	
24	Established timing 2	00	0	-	

SPEC. NUMBER SPEC. TITLE

NT116WHM-N21 Product Specification Rev. P0

PAGE 30 **OF 33**





PRODUCT GROUP REV ISSUE DATE

Customer SPEC Rev. P0 2016.11.30

25	Established timing 3	00	0	-	
26	Standard timing #1	01	1		Not Used
27		01	1		
28	Standard timing #2	01	1		Not Used
29		01	1		
2A	Standard timing #3	01	1		Not Used
2B		01	1		Het seed
2C	Standard timing #4	01	1		Not Used
2D	otandara tiriling // 1	01	1		
2E	Standard timing #5	01	1		Not Used
2F	Standard timing # 5	01	1		Not osed
30	Standard timing #6	01	1		Not Used
31	Standard timing #0	01	1		Not oscu
32	Standard timing #7	01	1		Not Used
33	Standard timing #7	01	1		Not oscu
34	Standard timing #8	01	1		Not Used
35	Standard timing #0	01	1		Not oscu
36		38	56	74.8	74.8MHz Main clock
37		1D	29	74.0	74.0WHZ WAIT COCK
38		56	86	1366	Hor Active = 1366
39		C8	200	200	Hor Blanking = 200
3A		50	80	-	4 bits of Hor. Active + 4 bits of Hor. Blanking
3B		00	0	768	Hor Active = 768
3C		1C	28	28	Ver Blanking = 28
3D		30	48	-	4 bits of Ver. Active + 4 bits of Ver. Blanking
3E	Detailed timing/ monitor descriptor #1	30	48	48	Hor Sync Offset = 48
3F		20	32	32	H Sync Pulse Width = 32
40		36	54	3	V sync Offset = 3 line
41		00	0	6	V Sync Pulse width: 6 line
42		00	0	256	Horizontal Image Size = 256.125 mm (Low 8 bits)
43		90	144	144	Vertical Image Size = 144 mm (Low 8 bits)
44		10	16	-	4 bits of Hor Image Size + 4 bits of Ver Image Size
45		00	0	0	Hor Border (pixels)
46		00	0	0	Vertical Border (Lines)
47		1A	26		Refer to right table

SPEC. NUMBER

SPEC. TITLE

NT116WHM-N21 Product Specification Rev. P0

PAGE 31 OF 33

A4(210 X 297)

B2014-Q011-O (3/3)





PRODUCT GROUP REV ISSUE DATE

Customer SPEC Rev. P0 2016.11.30

48 49 4A 4B	7A 13	122		
49 4A 4B		122		l .
4A 4B	12	4.0	49.9	49.86MHz Main clock
4B		19	4044	11. 4.11. 40.11
	56	86	1366	Hor Active = 1366
	C8	200	200	Hor Blanking = 200
4C	50	80	-	4 bits of Hor. Active + 4 bits of Hor. Blanking
4D	00	0	768	Ver Active = 768
4E	1C	28	28	Ver Blanking = 28
4F Detailed tim	30 jing/	48	-	4 bits of Ver. Active + 4 bits of Ver. Blanking
monitor	. 04	100	100	Hor Sync Offset = 100
51 descriptor		100	100	H Sync Pulse Width = 100
52	44	68	20	V sync Offset = 20 line
53	05	5	20	V Sync Pulse width: 20 line
54	00	0	256	Horizontal Image Size = 256.125 mm (Low 8 bits)
55	90	144	144	Vertical Image Size = 144 mm (Low 8 bits)
56	10	16	-	4 bits of Hor Image Size + 4 bits of Ver Image Size
57	00	0	0	Hor Border (pixels)
58	00	0	0	Vertical Border (Lines)
59	1A	26		
5A	00	0		
5B	00	0		
5C	00	0		
5D	00	0		
5E	00	0		
5F	00	0		Nvidia nvDPS Lowest refresh rate that does not cause any visual/ optical side effect
60	00	0		
61	00	0		
62 Detailed tim	- (//	0		
63 descriptor		0		
64	00	0		
65	00	0		
66	00	0		
67	00	0		
68	00	0		
69	00	0		
6A	00	0		
	00	0		

SPEC. NUMBER S

SPEC. TITLE

NT116WHM-N21 Product Specification Rev. P0

PAGE 32 OF 33

02 01 33





PRODUCT GROUPREVISSUE DATECustomer SPECRev. P02016.11.30

6C		00	0	0	Detailed Timing Description #4
6D		00	0	0	Flag
6E		00	0	0	Reserved
6F		02	2		For Brightness Table and Power consumption
70		00	0	0	Flag
71		OF	15		PWM % [7:0] @ Step 0
72		47	71		PWM % [7:0] @ Step 5
73		F9	249		PWM % [7:0] @ Step 10
74	Detailed timing/mo	0B	11		Nits [7:0] @ Step 0
75	nitor descriptor #4	3C	60		Nits [7:0] @ Step 5
76		6E	110		Nits [7:0] @ Step 10
77		OF	15		Panel Electronics Power @32x32 Chess Pattern=
78		12	18		Backlight Power @60 nits=
79		13	19		Backlight Power @Step 10=
7A		6E	110		Nits @ 100% PWM Duty =
7B		00	0	0	Flags
7C		00	0	0	Flags
7D		00	0	0	Flags
7E	Extension flag	00	0		
7F	Checksum	07	8		

SPEC. NUMBER SPEC. TITLE PAGE
NT116WHM-N21 Product Specification Rev. P0

PAGE
33 OF 33

B2014-Q011-O (3/3) A4(210 X 297)