

PROPRIETARY NOTE

THIS SPECIFICATION IS THE PROPERTY OF BOE BJ AND SHALL NOT BE REPRODUCED OR COPIED WITHOUT THE WRITTEN PERMISSION OF BOE BJ AND MUST BE RETURNED TO BOE BJ UPON ITS REQUEST



SPEC. NUMBER

PRODUCT GROUP

Rev.

ISSUE DATE

PAGE

LCM

P0

2016.2.25

1 OF 36

NV133FHM-N44

Preliminary Product Specification

Rev. P0

HEFEI BOE OPTOELECTRONICS TECHNOLOGY

PRODUCT GROUP	REV	ISSUE DATE	BOE
TLCM PRODUCT	P1	2015.9.27	

SPEC. NUMBER	SPEC. TITLE	PAGE
	NV133FHM-A10 Preliminary Product Specification	2 OF 36

REVISION HISTORY

REV.	ECN No.	DESCRIPTION OF CHANGES	DATE	PREPARED
P0	-	Initial Release	2016.2.25	储汉奇
P1	-			

2

Contents

No.	Items	Page
	REVISION HISTORY	2
	CONTENTS	3
1.0	General Description	4
2.0	Absolute Maximum ratings	6
3.0	Electrical specifications.	7
4.0	Optical specifications.	10
5.0	Interface Connection	15
6.0	Signal Timing Specification	18
7.0	Horizontal Timing Waveforms	20
8.0	Input Signals, Basic Display Colors & Gray Scale Of Colors	21
9.0	Power Sequence	22
10.0	Reliability Test	24
11.0	Handling & Cautions.	24
12.0	Label	25
13.0	Packing information	27
14.0	Mechanical Outline Dimension	28
15.0	EDID Table	30

1.0 General Description

1.1 Application

- Notebook PC With Touch function

1.2 General Specification

1.2.1.General Total Solution Specification(Table 1.)

<Table 1. General Specifications>

Parameter	Specification	Unit	Remarks
Active area	293.76 (H) x 165.24 (V)	mm	
Number of pixels	1920 (H) × 1080 (V)	pixels	
Pixel pitch	0.153 (H) X 0.153 (V)	mm	
Pixel arrangement	RGB Vertical stripe		
Display colors	262K	colors	
Display mode	Normally Black		
Dimensional outline	305.35(H)*188.45(V) (W/PCB)*3.2(Max) 305.35(H)*178.11(V)*3.2(Max)	mm	
Weight	250(max) (without OGS) 360(max) (with OGS)	g	
Back-light	Lower Down side, 1-LED Lighting Bar type		Note 1
Power consumption	P _D : 1.43 (max)	W	
	P _{BL} :2.45(max)	W	
	P _{total} :3.98(max)	W	

Notes : 1. LED Lighting Bar (36*LED Array)

PRODUCT GROUP		REV	ISSUE DATE	BOE
TLCM PRODUCT		P1	2015.9.27	
SPEC. NUMBER	SPEC. TITLE			PAGE
	NV133FHM-N44 Preliminary Product Specification			5 OF 36

2.0 ABSOLUTE MAXIMUM RATINGS


The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2.

< Table 2. Absolute Maximum Ratings >

Ta=25+/-2°C

Parameter	Symbol	Min.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	-0.5	4.0	V	Note 1
Logic Supply Voltage	V _{IN}	V _{SS} -0.3	V _{DD} +0.3	V	
Operating Temperature	T _{OP}	0	+50	°C	Note 2
Storage Temperature	T _{ST}	-20	+60	°C	

- Notes :
1. Permanent damage to the device may occur if maximum values are exceeded functional operation should be restricted to the condition described under normal operating conditions.
 2. Temperature and relative humidity range are shown in the figure below.
 95 % RH Max. (40 °C ≥ Ta)
 Maximum wet - bulb temperature at 39 °C or less. (Ta > 40 °C) No condensation.

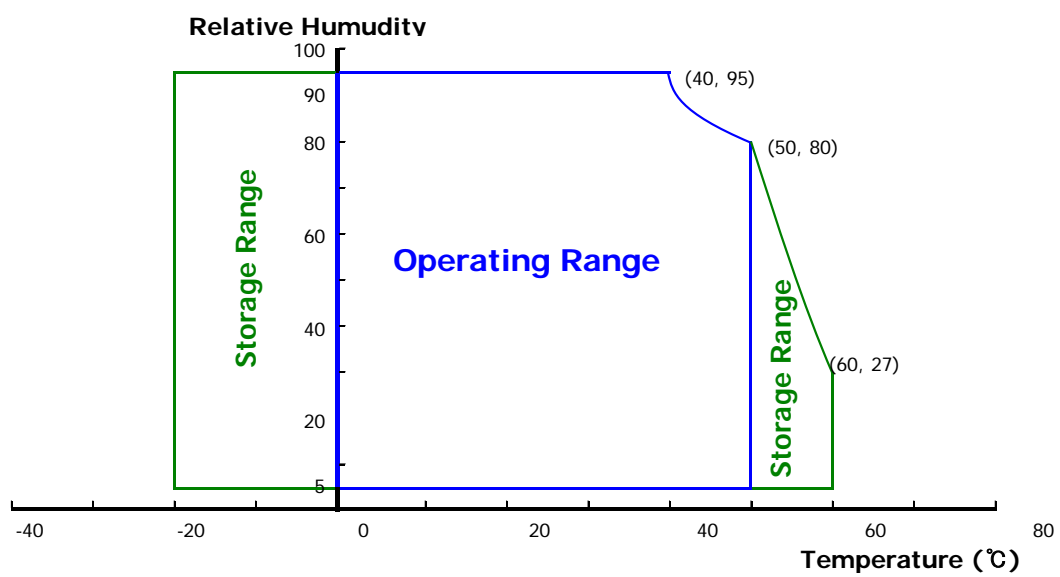

3.0 ELECTRICAL SPECIFICATIONS

3.1 Electrical Specifications

< Table 3. Electrical specifications >

Ta=25+/-2°C

Parameter		Min.	Typ.	Max.	Unit	Remarks
Power Supply Voltage	V _{DD}	3.0	3.3	3.6	V	Note 1
Permissible Input Ripple Voltage	V _{RF}	-	-	100	mV	At V _{DD} = 3.3V
Power Supply Current	I _{DD}	-	300	-	mA	Note 1
Differential Input Voltage	V _{ID}	120	-	1320	mV	
Power Consumption	P _D	-	1	1.2	W	Note 1
	P _{BL}	-	-	2.5	W	Note 2
	P _{total}	-	-	4.0	W	

Notes : 1. The supply voltage is measured and specified at the interface connector of LCM. The current draw and power consumption specified is for 3.3V at 25°C.

- a) Typ : Mosaic Pattern
- b) Max : Skip sub pixel255

2. Calculated value for reference (V_{LED} × I_{LED})

3.2 Backlight Unit

< Table 4. LED Driving guideline specifications >

Ta=25+/-2°C

Parameter		Min.	Typ.	Max.	Unit	Remarks	
LED Forward Voltage		V _F	-	-	2.9	V	-
LED Forward Current		I _F	-	21	-	mA	-
LED Power Consumption		P _{LED}	-	-	2.45	W	Note 1
LED Life-Time		N/A	15,000	-	-	Hour	I _F = 20mA
Power supply voltage for LED Driver		V _{LED}	6	12	21	V	
EN Control Level	Backlight on		2.0		5.0	V	
	Backlight off		0		1.0	V	
PWM Control Level	PWM High Level		2.0		5.0	V	
	PWM Low Level		0		0.1	V	
PWM Control Frequency		F _{PWM}	200	-	10,000	Hz	
Duty Ratio		-	1	-	100	%	Note3

Notes : 1. Power supply voltage 12V for LED Driver


Calculator Value for reference $I_F \times V_F \times 36 / \text{efficiency} = P_{LED}$

2. The LED Life-time define as the estimated time to 50% degradation of initial luminous.

3. 1% duty cycle is achievable with a dimming frequency less than 1KHz.

PRODUCT GROUP		REV	ISSUE DATE	BOE
TLCM PRODUCT		P1	2015.9.27	
SPEC. NUMBER	SPEC. TITLE			PAGE
	NV133FHM-N44 Preliminary Product Specification			8 OF 36

3.3 LED structure

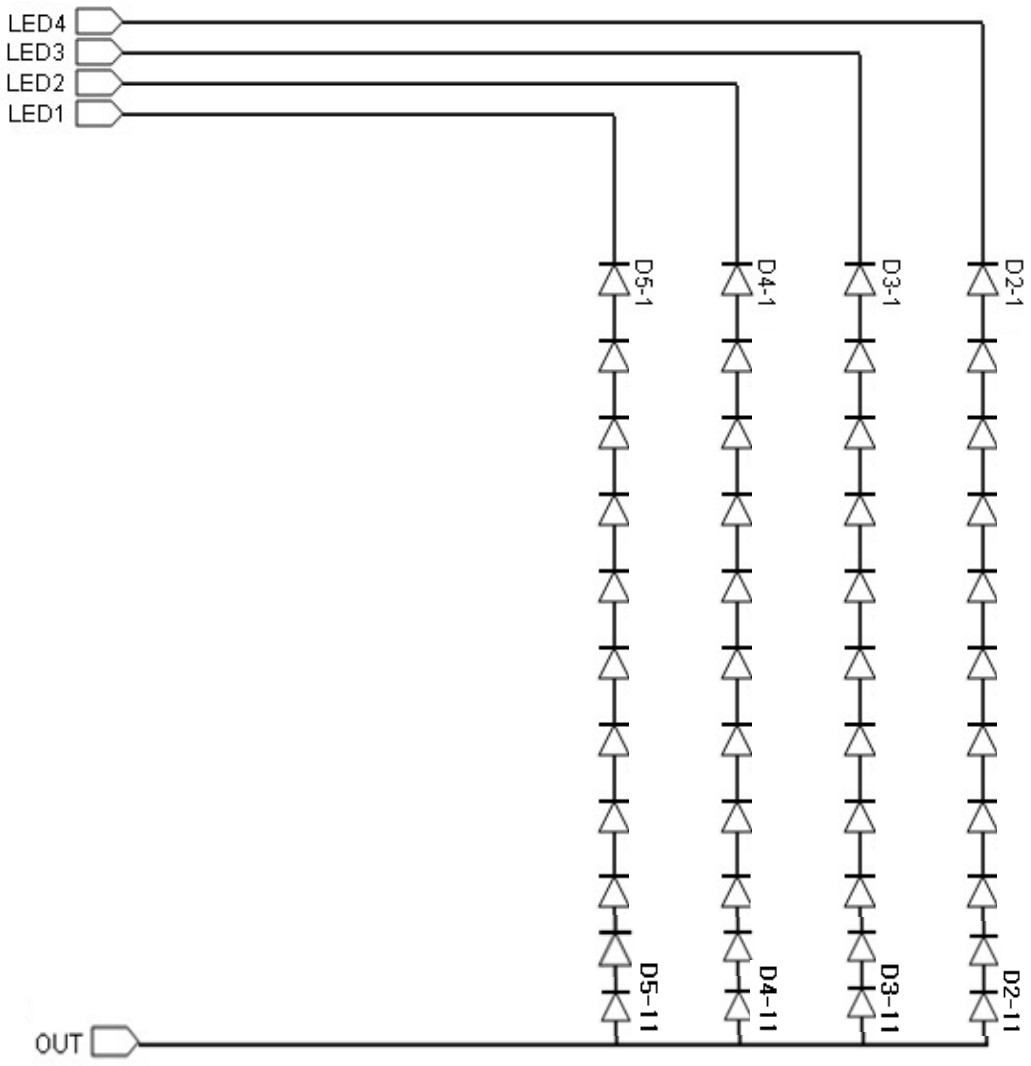

PRODUCT GROUP		REV	ISSUE DATE	BOE
TLCM PRODUCT		P1	2015.9.27	
SPEC. NUMBER	SPEC. TITLE			PAGE
	NV133FHM-N44 Preliminary Product Specification			9 OF 36

4.0 OPTICAL SPECIFICATION

4.1 Overview

The test of Optical specifications shall be measured in a dark room (ambient luminance ≤ 1 lux and temperature = $25 \pm 2^\circ\text{C}$) with the equipment of Luminance meter system (Goniometer system and TOPCON BM-5) and test unit shall be located at an approximate distance 50cm from the LCD surface at a viewing angle of θ and ϕ equal to 0° . We refer to $\theta\phi=0$ ($=\theta_3$) as the 3 o'clock direction (the "right"), $\theta\phi=90$ ($=\theta_{12}$) as the 12 o'clock direction ("upward"), $\theta\phi=180$ ($=\theta_9$) as the 9 o'clock direction ("left") and $\theta\phi=270$ ($=\theta_6$) as the 6 o'clock direction ("bottom"). While scanning θ and/or ϕ , the center of the measuring spot on the Display surface shall stay fixed. The backlight should be operating for 30 minutes prior to measurement. VDD shall be $3.3 \pm 0.3\text{V}$ at 25°C . Optimum viewing angle direction is 6 'clock.

4.2 Optical Specifications

<Table 5. Optical Specifications>

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle range	Horizontal	θ_3	CR > 10	-	85	-	Deg.	Note 1
		θ_9		-	85	-	Deg.	
	Vertical	θ_{12}		-	85	-	Deg.	
		θ_6		-	85	-	Deg.	
Luminance Contrast ratio		CR	$\theta = 0^\circ$	800	1000	-	-	Note 2
Luminance of White	Center	Y_w	$\theta = 0^\circ$ $I_{LED} = 21\text{mA}$	-	300	-	-	Note 3
White Luminance uniformity	8 Points	ΔY_9		80%	85%	-	-	Note 4
	-	-	-	-	-	-	-	
White Chromaticity		x_w	$\theta = 0^\circ$	TBD	TBD	TBD	-	Note 5
		y_w		TBD	TBD	TBD	-	
Reproduction of color	Red	x_R	$\theta = 0^\circ$	-0.03	0.588	+0.03	-	Note 5
		y_R			0.351		-	
	Green	x_G			0.333		-	
		y_G			0.566		-	
	Blue	x_B			0.159		-	
		y_B			0.135		-	
Gamut		-	-	40	45	50	%	
Response Time (Rising + Falling)		T_{RT}	$T_a = 25^\circ\text{C}$ $\theta = 0^\circ$	-	30	35	Ms	Note 6
Cross Talk		CT	$\theta = 0^\circ$	-	-	2.0	%	Note 7

PRODUCT GROUP		REV	ISSUE DATE	BOE
TLCM PRODUCT		P1	2015.9.27	
SPEC. NUMBER	SPEC. TITLE			PAGE
	NV133FHM-N44 Preliminary Product Specification			10 OF 36

Notes :

1. Viewing angle is the angle at which the contrast ratio is greater than 10. The viewing angles are determined for the horizontal or 3, 9 o'clock direction and the vertical or 6, 12 o'clock direction with respect to the optical axis which is normal to the LCD surface (see FIGURE 1).

2. Contrast measurements shall be made at viewing angle of $\Theta = 0$ and at the center of the LCD surface. Luminance shall be measured with all pixels in the view field set first to white, then to the dark (black) state .

(see FIGURE 1) Luminance Contrast Ratio (CR) is defined mathematically.

$$CR = \frac{\text{Luminance when displaying a white raster}}{\text{Luminance when displaying a black raster}}$$

3. Center Luminance of white is defined as luminance values of 5 point average across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations shown in FIGURE 2 for a total of the measurements per display.

4. The White luminance uniformity on LCD surface is then expressed as : $\Delta Y = \text{Minimum Luminance of 5(or 13) points} / \text{Maximum Luminance of 5(or 13) points}$.

(see FIGURE 2 and FIGURE 3).

5. The color chromaticity coordinates specified in Table 5 shall be calculated from the spectral data measured with all pixels first in red, green, blue and white. Measurements shall be made at the center of the panel.

6. The electro-optical response time measurements shall be made as FIGURE 4 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is T_r , and 90% to 10% is T_d .


7. Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (Y_A) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (Y_B) of that same area when any adjacent area is driven dark.

(See FIGURE 5).

PRODUCT GROUP		REV	ISSUE DATE	BOE
TLCM PRODUCT		P1	2015.9.27	
SPEC. NUMBER	SPEC. TITLE			PAGE
	NV133FHM-N44 Preliminary Product Specification			11 OF 36

4.3 Optical measurements

Figure 1. Measurement Set Up

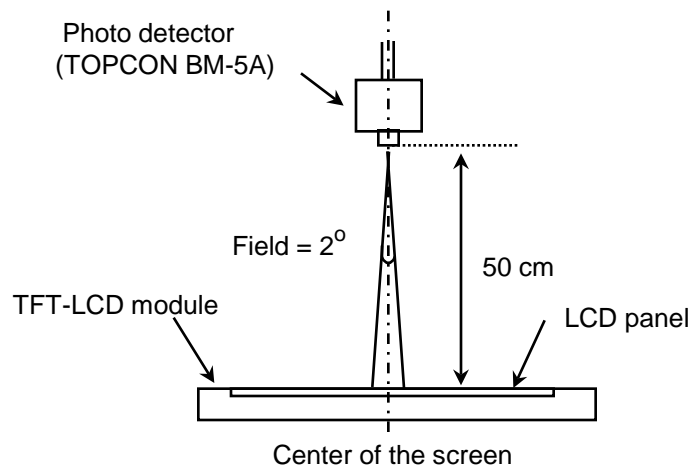


Optical characteristics measurement setup

Center Luminance of white is defined as luminance values of center across the LCD surface. Luminance shall be measured with all pixels in the view field set first to white. This measurement shall be taken at the locations of MDL Active area center.


PRODUCT GROUP		REV	ISSUE DATE	BOE
TLCM PRODUCT		P1	2015.9.27	
SPEC. NUMBER	SPEC. TITLE			PAGE
	NV133FHM-N44 Preliminary Product Specification			12 OF 36

Figure 2. Uniformity Measurement Locations (9 points)

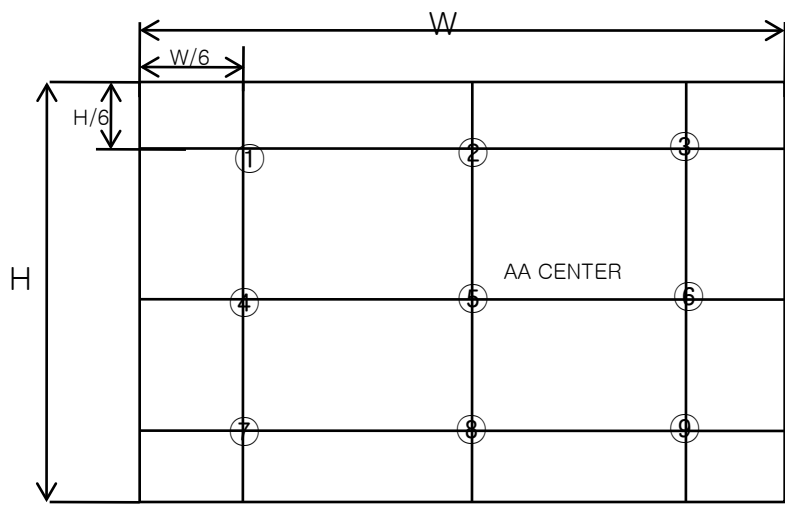


The White luminance uniformity on LCD surface is then expressed as : $\Delta Y9 = \text{Minimum Luminance of five points} / \text{Maximum Luminance of five points}$ (see FIGURE 2).

Figure 3. Response Time Testing

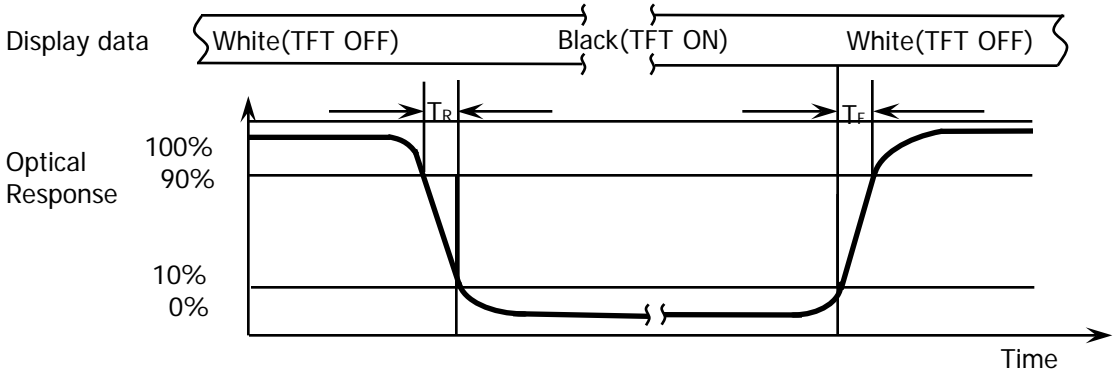

The electro-optical response time measurements shall be made as shown in FIGURE 3 by switching the "data" input signal ON and OFF. The times needed for the luminance to change from 10% to 90% is T_d and 90% to 10% is T_r .

Figure 4. Cross Modulation Test Description

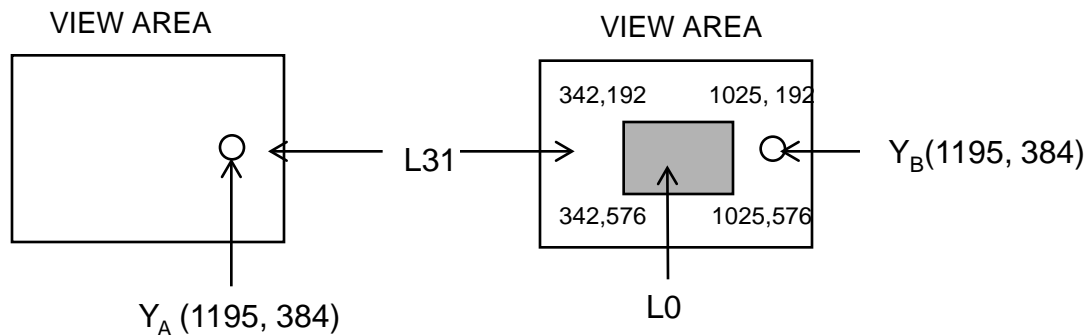

$$\text{Cross-Talk (\%)} = \left| \frac{Y_B - Y_A}{Y_A} \right| \times 100$$

Where:

Y_A = Initial luminance of measured area (cd/m²)

Y_B = Subsequent luminance of measured area (cd/m²)

The location measured will be exactly the same in both patterns

Cross-Talk of one area of the LCD surface by another shall be measured by comparing the luminance (Y_A) of a 25mm diameter area, with all display pixels set to a gray level, to the luminance (Y_B) of that same area when any adjacent area is driven dark (Refer to FIGURE 4).

5.0 INTERFACE CONNECTION.**5.1 Electrical Interface Connection**


The electronics interface connector is STM MSAK24025P30 or Compatible.

The connector interface pin assignments are listed in Table 6.

<Table 6. Pin Assignments for the Interface Connector>

Terminal	Symbol	Functions
Pin No.	Symbol	Description
1	CABC	CABC
2	H-GND	Ground
3	LAN1_N	Complement Signal Link _Lane1
4	LAN1_P	True Signal Link _Lane1
5	H-GND	Ground
6	LAN0_N	Complement Signal Link _Lane0
7	LAN0_P	True Signal Link _Lane0
8	H-GND	High Speed Ground
9	AUXP	True Signal Link _Auxiliary Channel
10	AUXN	Complement Signal Link _Auxiliary Channel
11	H-GND	Ground
12	LCD_VCC	Power Supply, 3.3V (typ.)
13	LCD_VCC	Power Supply, 3.3V (typ.)
14	NC	Reserved(BIST function)
15	H-GND	Ground
16	H-GND	Ground
17	HPD	HPD(Hot Plug Detect) Signal Pin
18	BL_GND	High Speed Ground
19	BL_GND	High Speed Ground
20	BL_GND	High Speed Ground
21	BL_GND	High Speed Ground
22	BL_EN	Backlight on/off Control pin
23	BL_PWM	Back light PWM Dimming
24	H-sync	H-sync
25	SDA	SDA
26	BL_PWR	Backlight power
27	BL_PWR	Backlight power
28	BL_PWR	Backlight power
29	BL_PWR	Backlight power
30	SCL	SCL

5-2. eDP Interface

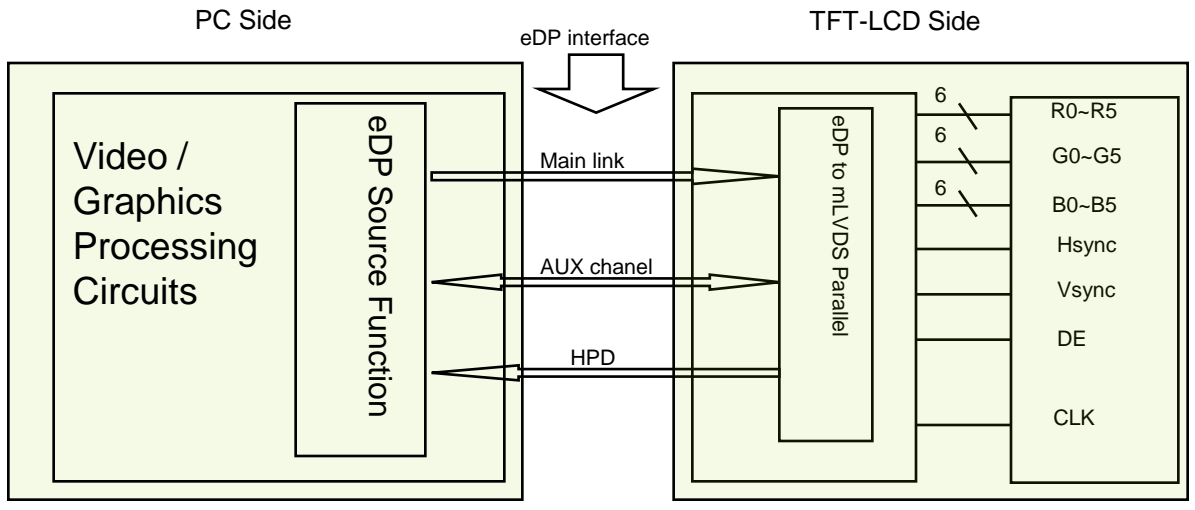

Note. Transmitter : HX8876-F04 or equivalent.
 Transmitter is not contained in Module.

5.3.eDP Input signal

Lane 0	
R0-5:0	G0-5:4
G0-3:0	B0-5:2
B0-1:0	R1-5:0
G1-5:0	B1-5:4
B1-3:0	R2-5:2
R2-1:0	G2-5:0
B2-5:0	R3-5:4
R3-3:0	G3-5:2
G3-1:0	B3-5:0

5.4 Back-light & LCM Interface Connection

<Table 7. Pin Assignments for the BLU & LCM Connector>

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	LED1	LED cathode connection	6	NC	No Connection
2	LED2	LED cathode connection	7	Vout	LED anode connection
3	LED3	LED cathode connection	8	Vout	LED anode connection
4	LED4	LED cathode connection	9	Vout	LED anode connection
5	NC	No Connection			

5.5 TP Interface Connection

Interface Connector: **IPEX-20542--006E-01**

<Table 8. Pin Assignments for the TP Interface Connector>

Terminal	Symbol	Functions
Pin No.	Symbol	Description
1	GND	Ground
2	HSYNC	LCD Hsync signal
3	Vdd	Power supply
4	/STOP	TP Function enable
5	DM	USB D- Pin
6	DP	USB D+ Pin

6.0 SIGNAL TIMING SPECIFICATION

6.1 The NV133FHM-A10 is operated by the DE only.


Item		Symbols	Min	Typ	Max	Unit
Clock	Frequency	1/Tc	100	148.5	160	MHz
Frame Period		Tv	1112	1125	1238	lines
			-	60	-	Hz
			25	16.67	15.15	ms
Vertical Display Period		Tvd	-	1080	-	lines
One line Scanning Period		Th	2080	2200	2400	clocks
Horizontal Display Period		Thd	-	1920	-	clocks

6.2 eDP Rx Interface Timing Parameter



The specification of the eDP Rx interface timing parameter is shown in Table 8.

<Table 9. eDP Rx Interface Timing Specification>

Item	Symbol	Min	Typ	Max	Unit	Remark
Spread spectrum clock	SSC		0.5		%	
Differential peak-to-peak input voltage at package pins	VRX-DIFFp-p	500	0	1000	mV	
Rx input DC common mode voltage	VRX_DC_CM	-	GND	-	V	
Differential termination resistance	RRX-DIFF	80	-	100	Ω	
Single-ended termination resistance	RRX-SE	40	-	60	Ω	
Rx short circuit current limit	IRX_SHORT	-	-	20	mA	
Intra-pair skew at Rx package pins (HBR) RX intra-pair skew tolerance at HBR	LRX_SKEW_INTRA_PAIR	-	-	150	ps	

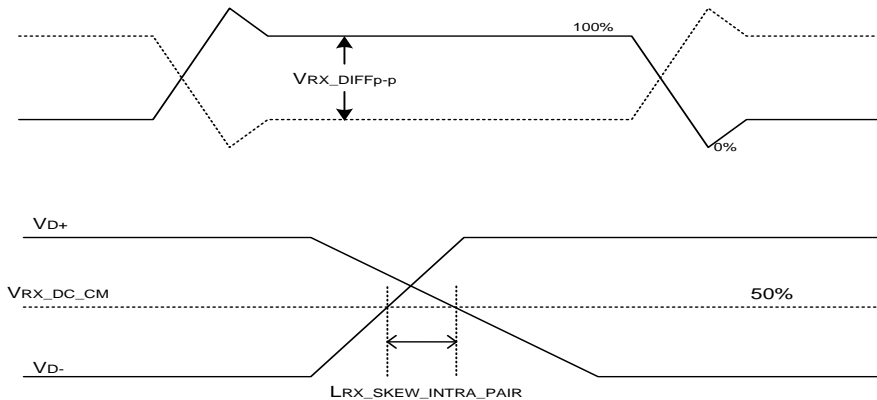

7.0 Horizontal Timing Waveforms

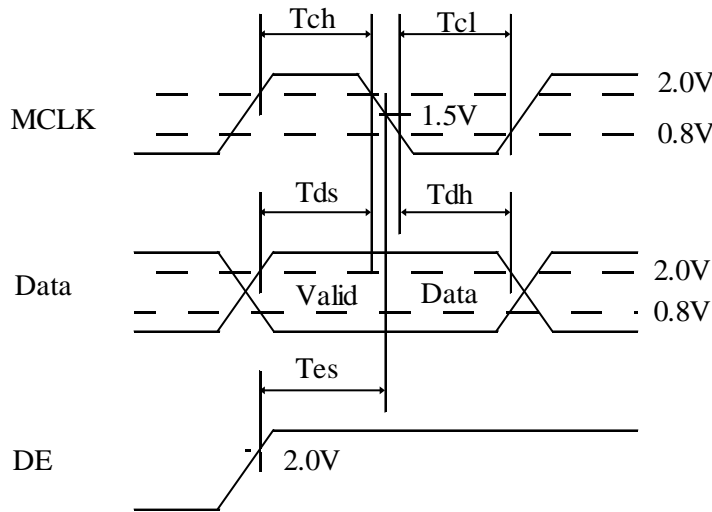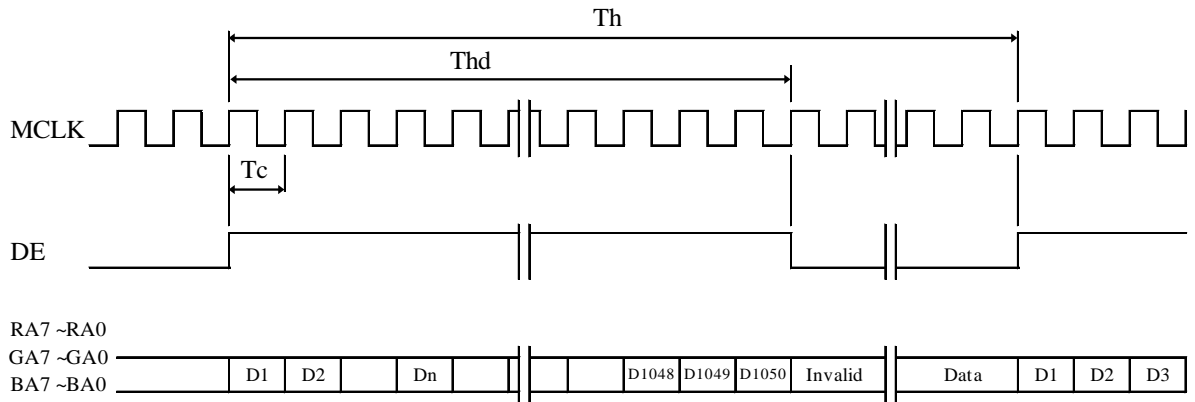


8.0 INPUT SIGNALS, BASIC DISPLAY COLORS & GRAY SCALE OF COLORS

Color & Gray Scale		RED DATA								GREEN DATA								BLUE DATA							
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale of RED	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	▽	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Gray Scale of GREEN	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1	0	0	0	0	0	0	0	0
	▽	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Gray Scale of BLUE	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Darker	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	0	1
	▽	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
Gray Scale of WHITE	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	△	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1
	Darker	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	1	0
	△	↑								↑								↑							
	▽	↓								↓								↓							
	Brighter	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1
	▽	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

9.0 POWER SEQUENCE

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence shall be as shown in below

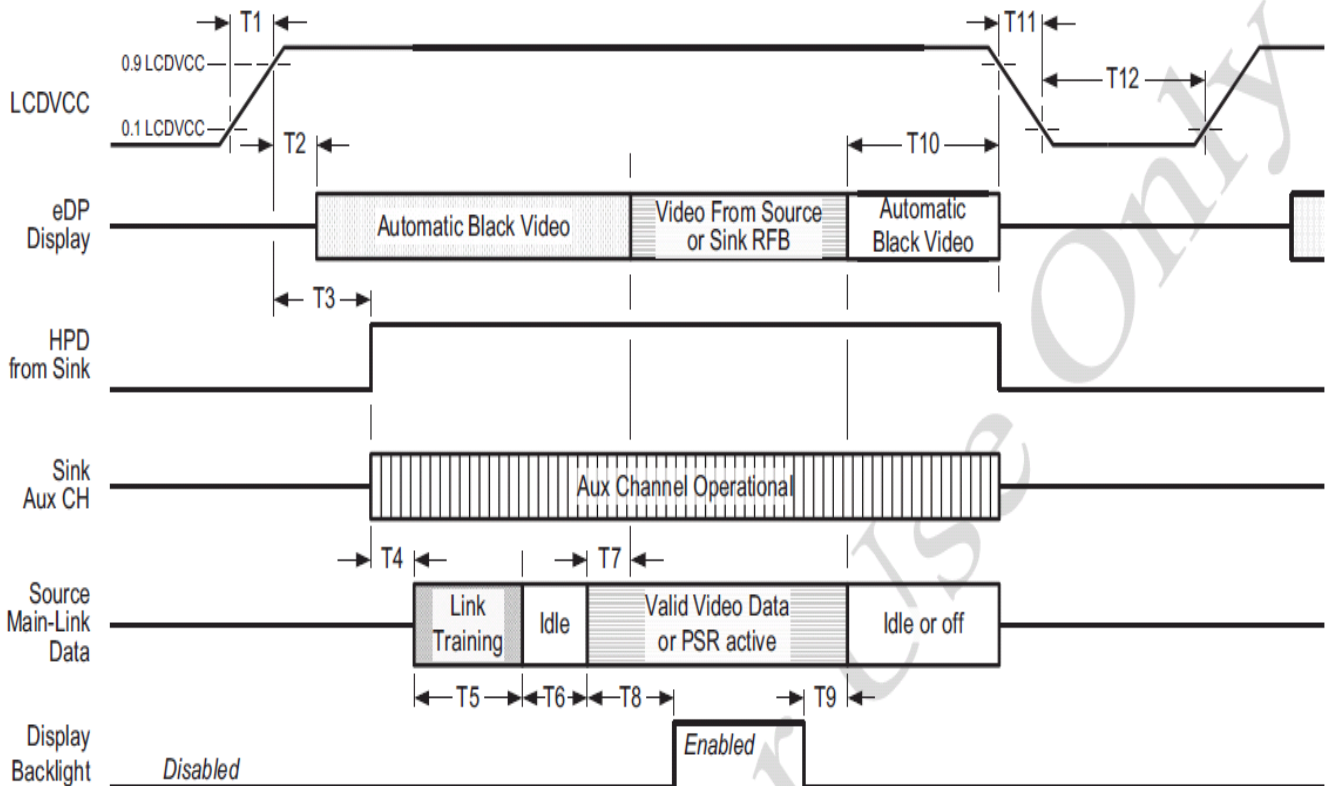

- $0.5 \text{ ms} \leq T1 \leq 10 \text{ ms}$
- $0 \leq T2 \leq 200 \text{ ms}$
- $0 \leq T3 \leq 200 \text{ ms}$
- $0 \leq T7 \leq 50 \text{ ms}$
- $0 \leq T10 \leq 500 \text{ ms}$
- $T11 \leq 10 \text{ ms}, 500\text{ms} \leq T12$

Notes:

1. When the power supply VDD is 0V, keep the level of input signals on the low or keep high impedance.
2. Do not keep the interface signal high impedance when power is on.
3. Back Light must be turn on after power for logic and interface signal are valid.

10.0 RELIABILITY TEST

The Reliability test items and its conditions are shown in below.

<Table 10. Reliability test>

No	Test Items	Conditions
1	High temperature storage test	Ta = 70 °C/16h
2	Low temperature storage test	Ta = -40 °C/16h
3	High temperature & high humidity operation test	Ta = 50 °C, 95%RH, 120 hrs
4	High temperature operation test	Ta = 50 °C, 4 hrs
5	Low temperature operation test	Ta = -10°C, 4hrs
6	Thermal shock	Ta = -30 °C ↔ 70 °C (1 hr), 30 cycle
7	Free fall	(6面/2次, 4角/1次; 15.6↓:50cm, 15.6↑: 40cm)
8	Impact	(10cm,500g半球形PU材质,upper test only)
9	Image stick	OQC: 40° C/12hr Wingia aging QRE: Room Temp 30min->1hr off->60° C 30min->1hr off->room temp 3min(5*8/Naver PIC/Wingia PIC/Win8 PIC)

11.0 HANDLING & CAUTIO

(1) Cautions when taking out the module

- Pick the pouch only, when taking out module from a shipping package.

(2) Cautions for handling the module

- As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
- As the LCD panel and back - light element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
- As the surface of the polarizer is very soft and easily scratched, use a soft dry cloth without chemicals for cleaning.
- Do not pull the interface connector in or out while the LCD module is operating.
- Put the module display side down on a flat horizontal plane.
- Handle connectors and cables with care.

(3) Cautions for the operation

- When the module is operating, do not lose CLK, ENAB signals. If any one of these signals is lost, the LCD panel would be damaged.
- Obey the supply voltage sequence. If wrong sequence is applied, the module would be damaged.

PRODUCT GROUP		REV	ISSUE DATE	BOE
TLCM PRODUCT		P1	2015.9.27	
SPEC. NUMBER	SPEC. TITLE			PAGE
	NV133FHM-N44 Preliminary Product Specification			24 OF 36

- (4) Cautions for the atmosphere
- Dew drop atmosphere should be avoided.
 - Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer packing pouch and under relatively low temperature atmosphere is recommended.
- (5) Cautions for the module characteristics
- Do not apply fixed pattern data signal to the LCD module at product aging.
 - Applying fixed pattern for a long time may cause image sticking.
- (6) Other cautions
- Do not disassemble and/or re-assemble LCD module.
 - Do not re-adjust variable resistor or switch etc.
 - When returning the module for repair or etc., Please pack the module not to be broken. We recommend to use the original shipping packages.

13.0 LABEL

(1) MDL label



Label Size: 36mm × 6mm

1. FG-CODE
 2. MDL ID
 3. MDL ID 条形码

Module ID Naming Rule:

序列号	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
代码	X	X	S	5	6	2	A	3	8	5	0	0	0	1	E	E	J
描述	GBN Code		等级	Line	Y	M	D	FG-CODE后四位				流水码 (00001~ZZZZZ)					

Year: 2015—5, 2016—6 2020---0, 2021---1.....
 Month: 1~12月 → 1~9, A, B, C
 Date: 1~31 → 1~9, A~V

PRODUCT GROUP		REV	ISSUE DATE	BOE
TLCM PRODUCT		P1	2015.9.27	
SPEC. NUMBER	SPEC. TITLE			PAGE
	NV133FHM-N44 Preliminary Product Specification			25 OF 36

(2) Box label


Label Size: 110 mm (L) × 55 mm (W)

Contents

1. FG-CODE
2. Box 产品数量
3. Box ID, 编码规则如下
4. Box Packing 日期
5. 客户产品料号
6. FG-CODE 后四位



MODEL:	QTY:
SERIAL NO:	DATE:




序列号	1	2	3	4	5	6	7	8	9	10	11	12	13
代码	X	X	S	5	6	2	A	0	0	0	1	E	A
描述	GBN Code		等级	Line	Y	M	Rev	流水码 (00001~ZZZZZZ)					

PRODUCT GROUP		REV	ISSUE DATE	BOE
TLCM PRODUCT		P1	2015.9.27	
SPEC. NUMBER	SPEC. TITLE			PAGE
	NV133FHM-N44 Preliminary Product Specification			26 OF 36


13.0 PACKING INFORMATION

13.1 Packing order

- Place 1pcs LCM on a tray with one EPE spacer upside
- Capacity : 1pcs/Tray

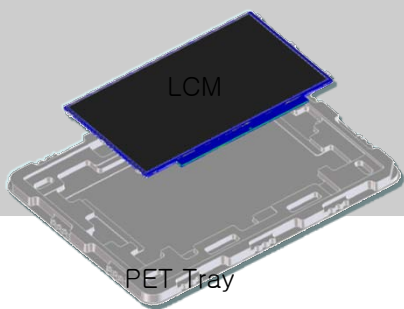


- Place 26pcs PET tray in a PE bag
- Capacity: 25pcs/PE Bag

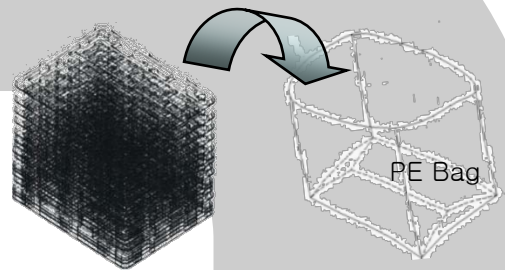

- 3 layers per Pallet, 4 inner boxes per layer,
- Pallet outer package : Protective film & Paper Corner
- Capacity: 300pcs/Pallet

Paper Conner Belt tape

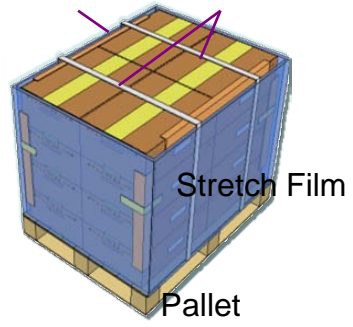

- Place packed PET trays into a inner box with EPE boards protecting
- Capacity : 25pcs/Inner Box




15.2 Notes

- Box Dimension: 500mm × 400mm × 300mm
- Package Quantity in one Box: 25 pcs
- Total Weight: TBD

14. MECHANICAL OUTLINE DIMENSION


14.1 MDL Outline Dimension

Figure 6. MDL Outline Dimensions (Front view)

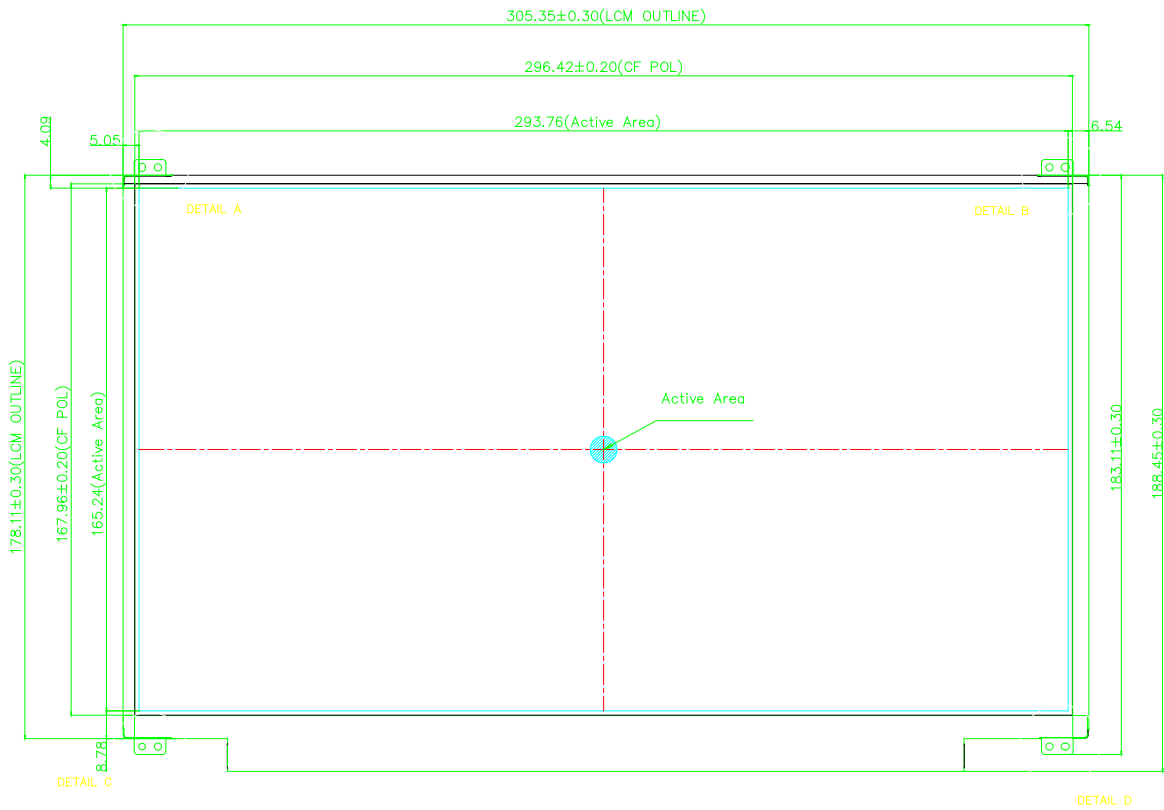

14.2 Total Solution Outline Dimension

Figure 7. MDL Outline Dimensions (Rear view)

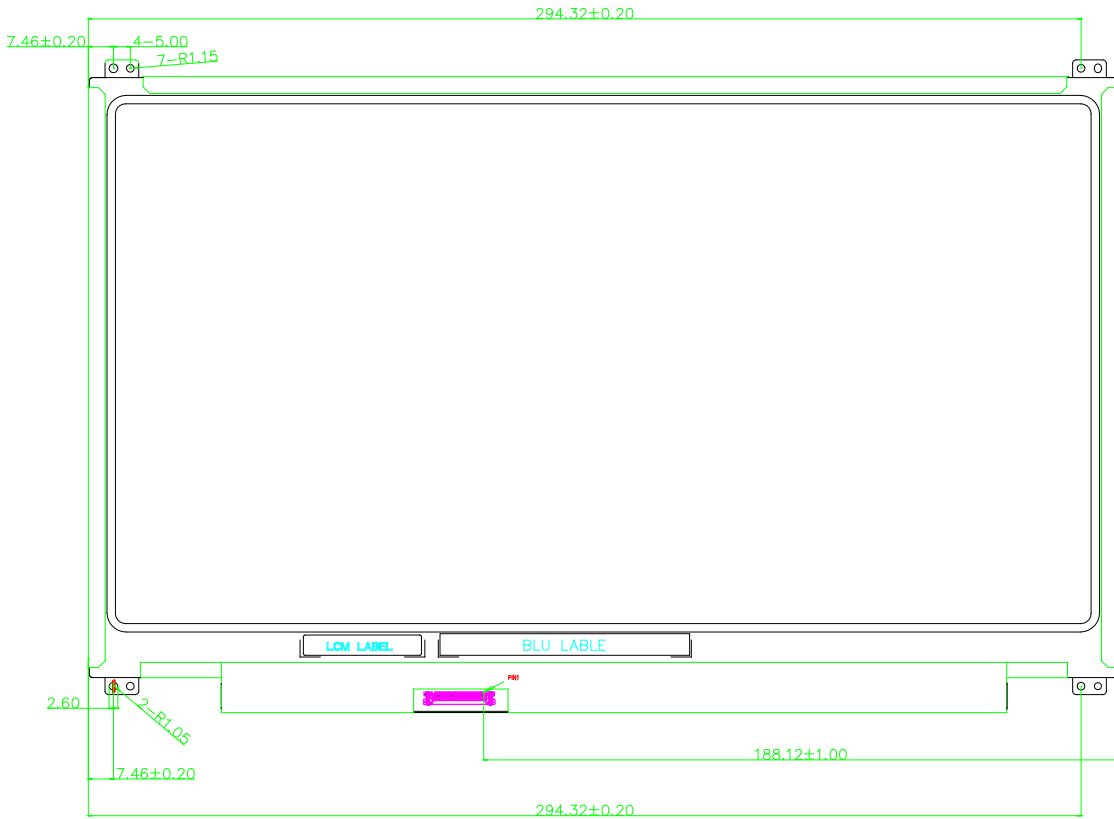

15.0 EDID Table

Address (HEX)	Function	Hex	Dec	crc	Input values.	Notes
00	Header	00	0		0	EDID Header
01		FF	255		255	
02		FF	255		255	
03		FF	255		255	
04		FF	255		255	
05		FF	255		255	
06		FF	255		255	
07		00	0		0	
08	ID Manufacturer Name	09	9		BOE	ID = BOE
09		E5	229			
0A	ID Product Code	B8	184		1720	ID = 1720
0B		06	6			
0C	32-bit serial No.	00	0			
0D		00	0			
0E		00	0			
0F		00	0			
10	Week of manufacture	01	1		1	
11	Year of Manufacture	1A	26		2016	Manufactured in 2016
12	EDID Structure Ver.	01	1		1	EDID Ver 1.0
13	EDID revision #	04	4		4	EDID Rev. 0.4
14	Video input definition	95	149		-	digital signal/DP input
15	Max H image size	1D	29		29	29 cm (Approx)
16	Max V image size	11	17		17	17 cm (Approx)
17	Display Gamma	78	120		2.2	Gamma curve = 2.2
18	Feature support	0A	10			RGB display, Preferred Timming mode
19	Red/Green low bits	A3	163		-	Red / Green Low Bits
1A	Blue/White low bits	F0	240		-	Blue / White Low Bits
1B	Red x high bits	99	153	614	0.588	Red (x) = 10011001 (0.6)
1C	Red y high bits	59	89	358	0.351	Red (y) = 01011001 (0.35)
1D	Green x high bits	57	87	348	0.333	Green (x) = 01010111 (0.34)
1E	Green y high bits	8C	140	563	0.566	Green (y) = 10001100 (0.55)
1F	Blue x high bits	29	41	163	0.159	Blue (x) = 00101001 (0.16)
20	BLue y high bits	23	35	143	0.135	Blue (y) = 00100011 (0.14)
21	White x high bits	50	80	320	TBD	White (x) = 01010000 (0.313)
22	White y high bits	54	84	336	TBD	White (y) = 01010100 (0.329)
23	Established timing 1	00	0		-	
24	Established timing 2	00	0		-	

PRODUCT GROUP

REV

ISSUE DATE



TLCM PRODUCT

P1

2015.9.27

SPEC. NUMBER

SPEC. TITLE

NV133FHM-N44 Preliminary Product Specification

PAGE

30 OF 36

Address (HEX)	Function	Hex	Dec	crc	Input values.	Notes
25	Established timing 3	00	0		-	
26	Standard timing #1	01	1			Not Used
27		01	1			
28	Standard timing #2	01	1			Not Used
29		01	1			
2A	Standard timing #3	01	1			Not Used
2B		01	1			
2C	Standard timing #4	01	1			Not Used
2D		01	1			
2E	Standard timing #5	01	1			Not Used
2F		01	1			
30	Standard timing #6	01	1			Not Used
31		01	1			
32	Standard timing #7	01	1			Not Used
33		01	1			
34	Standard timing #8	01	1			Not Used
35		01	1			
36	Detailed timing/monitor descriptor #1	36	54		138.8	138.78MHz Main clock
37		36	54			
38		80	128		1920	Hor Active = 1920
39		A0	160		160	Hor Blanking = 160
3A		70	112		-	4 bits of Hor. Active + 4 bits of Hor. Blanking
3B		38	56		1080	Ver Active = 1080
3C		20	32		32	Ver Blanking = 32
3D		40	64		-	4 bits of Ver. Active + 4 bits of Ver. Blanking
3E		30	48		48	Hor Sync Offset = 48
3F		20	32		32	H Sync Pulse Width = 32
40		35	53		3	V sync Offset = 3 line
41		00	0		5	V Sync Pulse width : 5 line
42		26	38		294	Horizontal Image Size = 294 mm (Low 8 bits)
43		A5	165		165	Vertical Image Size = 165 mm (Low 8 bits)
44		10	16		-	4 bits of Hor Image Size + 4 bits of Ver Image Size
45		00	0		0	Hor Border (pixels)
46	00	0		0	Vertical Border (Lines)	
47	1A	26			Refer to right table	

PRODUCT GROUP

REV

ISSUE DATE



TLCM PRODUCT

P1

2015.9.27

SPEC. NUMBER

SPEC. TITLE

NV133FHM-N44 Preliminary Product Specification

PAGE

31 OF 36

Address (HEX)	Function	Hex	Dec	crc	Input values.	Notes
48	Detailed timing/monitor descriptor #2	5E	94		111.0	111.02MHz Main clock
49		2B	43			
4A		80	128		1920	Hor Active = 1920
4B		A0	160		160	Hor Blanking = 160
4C		70	112		-	4 bits of Hor. Active + 4 bits of Hor. Blanking
4D		38	56		1080	Ver Active = 768
4E		20	32		32	Ver Blanking = 32
4F		40	64		-	4 bits of Ver. Active + 4 bits of Ver. Blanking
50		30	48		48	Hor Sync Offset = 48
51		20	32		32	H Sync Pulse Width = 32
52		35	53		3	V sync Offset = 3 line
53		00	0		5	V Sync Pulse width : 5 line
54		26	38		294	Horizontal Image Size = 294 mm (Low 8 bits)
55		A5	165		165	Vertical Image Size = 165 mm (Low 8 bits)
56		10	16		-	4 bits of Hor Image Size + 4 bits of Ver Image Size
57		00	0		0	Hor Border (pixels)
58		00	0		0	Vertical Border (Lines)
59		1A	26			
5A		Detailed timing/monitor descriptor #3	00	0		
5B	00		0			
5C	00		0			
5D	FE		254			
5E	00		0			
5F	42		66		B	Manufacture name : BOEHF
60	4F		79		O	
61	45		69		E	
62	20		32			
63	48		72		H	
64	46		70		F	
65	0A		10			
66	20		32			
67	20		32			
68	20	32				
69	20	32				
6A	20	32				
6B	20	32				

Address (HEX)	Function	Hex	Dec	crc	Input values.	Notes
6C	Detailed timing/monitor descriptor #4	00	0			Product Name Tag (ASCII)
6D		00	0			
6E		00	0			
6F		FE	254			
70		00	0			
71		4E	78		N	Model name : NV133FHM-N44
72		56	86		V	
73		31	49		1	
74		33	51		3	
75		33	51		3	
76		46	70		F	
77		48	72		H	
78		4D	77		M	
79		2D	45		-	
7A		4E	78		N	
7B		34	52		4	
7C	34	52		4		
7D	0A	10				
7E	Extension flag	00	0			
7F	Checksum	07	7	7	-	